POWER X CHANGE®

ONE FOR ALL.

The clever battery for workshop and garden.

Einhell Germany AG









TOOLS

| Power Tools |
| Stationary Tools |

2016/2017

Einhell. Well done.

Based in Landau an der Isar in southern Germany, Einhell Germany AG is one of the world's leading suppliers of in-house developed and distributed solutions for DIY enthusiasts and trade professionals for use in the home, garden and for leisure purposes. For more than 50 years and in more than 40 countries, Einhell has provided professional expertise in its partnerships with retailers for the supply of hand-held power tools, stationary tools and machines including garden equipment and water technology.

With its tagline **"Einhell® WELL DONE"**, Einhell can increasingly claim to be blazing a trail in the development of innovative new products and technologies that impress customers with their outstanding value for money.

As a company, Einhell focuses on generating sustainable international growth as well as reinforcing its position in the market by supplying **„Brand Quality at the Best Price"**



Einhell.
Brand quality and service.

- Our new multi-stage quality assurance system covers everything without exception: from audits of our production facilities around the world to our complete service for the end user.
- The Einhell RED Service covering the D/A/CH markets provides fast, all-round expert assistance and comes with a 10-year parts availability guarantee.





POWER TOOLS

Power X-Change 4

The battery system 4
Cordless drill 8
Cordless impact drill 10
Cordless impact driver 12
Cordless rotary hammer 13
Cordless all-purpose saw 14
Cordless hand-held circular saw 15
Cordless pendulum jigsaw 15
Cordless angle grinder 16
Cordless multi sander 17
Cordless lights 18
Cordless radio 19
USB power bank 19
Power X-Change accessories (batteries, charger) 20

Screwing 22



Cordless Screwdriver (Li-Ion) 22
Cordless drill (Li-Ion) 24
Cordless impact drill (Li-Ion) 32
Cordless impact driver (Li-Ion) 34
Cordless drill (NiCd) 36
Cordless impact drill (NiCd) 39
Drywall screw gun 40

Drilling & mixing 41



Impact drill 42
Cordless rotary hammer 48
Rotary hammer 49
Demolition hammer 53
Paint and mortar mixer 54

Cutting 56



Cordless angle grinder 57
Angle grinder 58

Milling & Planing 64



Masonry channel cutter 65
Biscuit jointer 65
Router 66
Electric planer 67

Sawing 68



Cordless pendulum jigsaw 69
Jigsaw 70
Cordless all-purpose saw 72
All-purpose saw 73
Cordless hand-held circular saw 74
Mini hand-held circular saw 75
Hand-held circular saw 76

Grinding 79



Multimaxx cordless 80
Multimaxx 82
Grinding and engraving tool 83
Delta sander 84
Cordless multi sander 85
Multi sander 85
Orbital sander 88
Eccentric sander 90
Belt sander 91
Drywall power sander 92

More power tools 93



Cordless tacker 93
Hot air gun 94

STATIONARY TOOLS

Woodworking 96



Crosscut and mitre saw with table 98
Mitre saw 100
Drag, crosscut and mitre saw 102
Table saw 104
Slide 109
Stationary planer 110
Band saw 111
Scroll saw 111
Stationary belt grinder 112
Stationary belt-disc grinder 113
Woodworking lathe 113
Woodworking accessories 114

Cleaning systems 117



Ash vacuum cleaner 118
Wet and dry vacuum cleaner 119
Vacuum cleaner accessories 125
High pressure cleaner 126
High pressure cleaner accessories 129

Air tools 130



Compressor 131
Air tools accessories 140

Tile/stone cutting 145



Tile cutting machine 146
Stone cutting machine 148

Metalworking 150



Bench grinder 151
Wet-dry grinder 153
Upright belt grinder/sander 154
Metal cutting saw 154
Metalworking accessories 155

Point of sale systems 156

Service 158

Einhell Germany AG recommends accessories from

kwb GERMANY

www.kwb.eu

POWER X CHANGE®

ONE FOR ALL.

THE CLEVER BATTERY SYSTEM FOR WORKSHOP AND GARDEN.



German
Designed
Quality
Einhell Germany AG

BOOSTED BY
TWIN PACK©
2 x 18 V = **36 V SUPERPOWER**

BUY ONCE, SAVE FOR EVER.

FREEDOM FROM CABLES.






NOW THERE'S EVEN MORE.


MORE APPLICATIONS.

The Power X-Change system includes batteries with a nominal charge of 1.5 Ah to 5.2 Ah - so there's always a battery for every application!

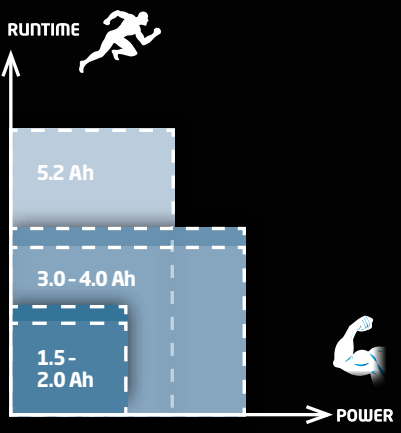

SHORT CHARGING TIME.

Innovative battery technology – optimized charging – much shorter charging times. The 1.5 Ah battery, for example, is ready for use again after charging for just 30 minutes.

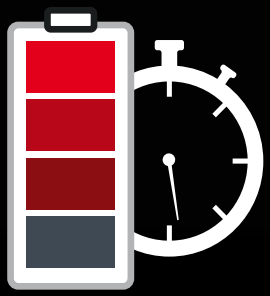

MORE POWER.

Twin-Pack technology for maximum power:
For extremely energy-intensive applications 2 rechargeable batteries are simply used in one machine – e.g. in the lawn mower.
So the power comes from 2 x 18 V = 36 V – unique in the DIY sector.



MORE SAFETY.

The Einhell ABS – Active Battery Management System – is setting the standard in terms of safety.
The temperature, current and voltage are constantly monitored, not only of the battery as a whole but also of each individual battery cell.
This is the maximum possible safety.



MONITORED BY
ABS Active Battery Management System

POWER X-CHANGE.

PUTTING THE SYSTEM INTO BATTERY POWER.

€ BUY 1 SET.

Start your
Power X-Change family!
Buy one set consisting of

Power tool

+ Battery

+ Charger



% START SAVING RIGHT AWAY.

Buy your next power and garden tools

WITHOUT the battery and WITHOUT the charger.

So you'll save with every new tool purchase.



! OR INDIVIDUALLY.

The choice is yours: you can also buy each tool and each battery + charger individually.



POWER X-CHANGE

Amazing! One for all – all with one.



Florian Hertel
(Supply Chain Management, Einhell Germany AG)

Six months ago I started using the Power X-Change system developed by Einhell. Now I no longer have to spend time looking for the right battery for the tool I need – or for the right charger! ONE battery fits in ALL the tools. No hassle – and it saves time AND money!
Now work around the house and in the garden is more enjoyable and I can get on with the jobs more quickly.

Note: For safe handling of the products please refer to the instructions in the operating manual.

CORDLESS DRILL

TE-CD 18 Li Brushless

SOLO

NEW!



POWER X CHANGE

CE

Battery pack	Compatible with Power X-Change
Torque	60 Nm
Gears	2-speed gearbox
Speed	0 - 500 min^{-1} / 0 - 1800 min^{-1}
Torque selector settings	19 + 1
Drill chuck	13 mm (single sleeve)
Standard accessories	Additional handle
Net weight | gross weight	1.1 kg | 1.3 kg
Packing dimensions	235 x 196 x 76 mm
Packaging unit	5
Article number	45.138.50
EAN code	4 006825 610130

CORDLESS DRILL

TE-CD 18/2 Li

WITH 2ND BATTERY PACK

NEW!



POWER X CHANGE

CE

Battery pack	18 V / 1500 mAh / Li-Ion
Torque	44 Nm
Gears	2-speed gearbox
Speed	0 – 350 min^{-1} / 0 – 1250 min^{-1}
Torque selector settings	20 + 1
Drill chuck	10 mm (single-sleeve)
Charging time	30 min
Standard accessories	2nd battery pack, 30 min fast charger, transport and storage case
Net weight | gross weight	1.4 kg | 4.0 kg
Packing dimensions	325 x 100 x 330 mm
Packaging unit	5
Article number	45.138.30
EAN code	4 006825 607321



High quality quick-change chuck made of metal



Brushless motor for longer operating times and more power



Single-sleeve quick-change chuck



2-speed metal gearbox



High-grade LED light



Safe grip thanks to additional handle



High-grade LED light



Slim and ergonomic design with soft grip

CORDLESS DRILL

TE-CD 18 Li



TECHNIK ZU HAUSE.de sehr gut

DE: rating "Very good"

POWER X CHANGE

Battery pack	18 V / 1500 mAh / Li-Ion
Torque	48 Nm
Gears	2-speed gearbox
Speed	0 – 320 min^{-1} / 0 – 1350 min^{-1}
Torque selector settings	23 + 1
Drill chuck	10 mm (single sleeve)
Charging time	30 min
Standard accessories	System battery 1.5 Ah, 30 min fast charger, transport and storage case
Net weight | gross weight	1.5 kg | 3.7 kg
Packing dimensions	420 x 335 x 105 mm
Packaging unit	4
Article number	45.136.90
EAN code	4 006825 592986



30 min fast charger



Direction indicator



Single-sleeve quick chuck



Battery technology with Einhell ABS

Einhell Germany AG

POWER X CHANGE

CORDLESS DRILL

TE-CD 18 Li with 2nd system battery

Identical to TE-CD 18 Li, but with second system battery



Art. No.	45.136.87
PU	4
EAN code	4 006825 602708

CORDLESS DRILL

TE-CD 18 Li - Solo

Identical to TE-CD 18 Li, but without system battery and fast charger



Art. No.	45.136.92
PU	8
EAN code	4 006825 593327



BRUSHLESS MOTORS

Brushless motors – the next generation power source for powerful DIY tools

Product development with a punch

Brushless motors are more effective than brushed electric motors and therefore perform better - that›s why this new development really packs a punch!

Longer operating times

Brushless motors have up to 50 % more battery life per charge and therefore cause fewer interruptions to the work and make light work of lengthy jobs in the home and garden.

Long service life

Since they are so highly effective, brushless motors do not heat up during use like other motors, keeping wear and tear to a minimum and guaranteeing a longer service life.

CORDLESS IMPACT DRILL

TE-CD 18 Li-i Brushless

SOLO

NEW!



POWER X CHANGE

Battery pack	Compatible with Power X-Change
Torque	60 Nm
Gears	2-speed gearbox
Speed	0 - 500 min^{-1} / 0-1800 min^{-1}
Blow rate	0 - 9350 min^{-1} / 0 - 31500 min^{-1}
Torque selector settings	19 + 1 + 1
Drill chuck	13 mm (single sleeve)
Standard accessories	Additional handle
Net weight | gross weight	1.4 kg | 1.7 kg
Packing dimensions	250 x 200 x 74 mm
Packaging unit	5
Article number	45.138.60
EAN code	4 006825 612417



High quality quick-change chuck made of metal



Brushless motor for longer operating times and more power



Screw fixings, drilling, hammer drilling



Safe grip thanks to additional handle

CORDLESS IMPACT DRILL

TE-CD 18-2 Li-i



POWER X CHANGE

CE

Battery pack	18 V / 1500 mAh / Li-Ion
Torque	48 Nm
Gears	2-speed gearbox
Speed	0 – 320 min^{-1} / 0 – 1350 min^{-1}
Blow rate	0 - 5120 min^{-1} / 0 - 21600 min^{-1}
Torque selector settings	23 + 1 + 1
Drill chuck	13 mm (single sleeve)
Charging time	30 min
Standard accessories	System battery 1.5 Ah, 30 min fast charger, additional handle, metal depth stop, transport and storage case
Net weight | gross weight	1.8 kg | 4.0 kg
Packing dimensions	420 x 335 x 105 mm
Packaging unit	4
Article number	45.138.00
EAN code	4 006825 596472




Screw fixings, drilling, hammer drilling



Large 13 mm quick-change chuck



Handy belt clip



Battery technology with Einhell ABS

Einhell Germany AG

CORDLESS IMPACT DRILL

TE-CD 18-2 Li-i - Solo

Identical to TE-CD 18-2 Li-i, but without system battery and fast charger



Art. No.	45.138.02
PU	8
EAN code	4 006825 596779

POWER X CHANGE FAMILY



BOOSTED BY
TWIN PACK©
2 x 18 V = **36 V SUPERPOWER**

CORDLESS IMPACT DRIVER

TE-CI 18 Li





DE: rating "Very good"

Battery pack	**18 V / 1500 mAh / Li-Ion**
Speed	**0 – 2300 min^{-1}**
Torque	**140 Nm**
Charging time	**30 min**
Gears	**1-speed gearbox**
Hexagon fitting	**6.35 mm (1/4")**
Standard accessories	**System battery 1.5 Ah, 30 min fast charger, transport and storage case**
Net weight | gross weight	**1.4 kg | 3.4 kg**
Packing dimensions	**330 x 110 x 308 mm**
Packaging unit	**5**
Article number	**45.100.20**
EAN code	**4 006825 601763**



The unrivaled Triathlon motor – power, speed and endurance



Special mechanism to reduce impact on the joints from screwing action



High-quality, robust design



Short, ergonomic design with soft grip

CORDLESS IMPACT DRIVER
TE-CI 18 Li
Item identical to TE-CI 18 Li, but with 3.0 Ah system battery



Art. No.	**45.100.21**
PU	**5**
EAN code	**4 006825 601794**

CORDLESS IMPACT DRIVER
TE-CI 18 Li - Solo
Item identical to TE-CI 18 Li, but without system battery and fast charger



Art. No.	**45.100.23**
PU	**10**
EAN code	**4 006825 603507**

CORDLESS ROTARY HAMMER

TE-HD 18 Li

NEW!



POWER X CHANGE

Battery pack	18 V / 1500 mAh / Li-Ion
Speed	0 – 1100 min^{-1}
Blow rate/strength	0 – 5700 min^{-1} / 1.0 J
Drilling capacity concrete	12 mm
Drill chuck	SDS-plus tool holder
Standard accessories	System battery 1.5 Ah, 30 min fast charger, bit holder, transport and storage case
Net weight | gross weight	1.5 kg | 4.3 kg
Packing dimensions	110 x 330 x 410 mm
Packaging unit	4
Article number	45.138.10
EAN code	4 006825 604047



SDS-plus tool holder



Robust metal gearbox



Simple speed setting control



LED-light

Einhell Germany AG

CORDLESS ROTARY HAMMER

TE-HD 18 Li - Solo

Item identical to TE-HD 18 Li, but without system battery and fast charger

NEW!



Art. No.	45.138.12
PU	8
EAN code	4 006825 604054

CORDLESS ALL-PURPOSE SAW

TE-AP 18 Li

SOLO



POWER X CHANGE

CE

Battery pack	Compatible with Power X-Change
Blade speed	0 – 2600 min^{-1}
Cutting depth (wood/steel)	100 / 6 mm
Pendulum action	–
Stroke height	22 mm
Saw blade thickness	0.6 - 1.6 mm
Standard accessories	1 saw blade (wood)
Net weight | gross weight	1.7 kg | 2.0 kg
Packing dimensions	410 x 80 x 160 mm
Packaging unit	6
Article number	43.263.00
EAN code	4 006825 601381

TRIATHLON MOTOR

TRIATHLON MOTOR –
HIGH-QUALITY MOTOR FOR EXCELLENT SCREW FITTING RESULTS



Power

Much more torque provided by 4-pole motor (2 magnets) instead of 2-pole motor with no increase in size – so it is small and handy yet still powerful!



Speed

Improved power transmission resulting in low speed loss under load. This means more torque and faster progress with jobs!



Endurance


The Triathlon motor is more efficient than standard motors and therefore boasts lower energy consumption and less wear. This means a longer battery life and therefore more screws fitted with every battery charge!



For universal use in gardens, workshops and on building sites



The unrivaled Triathlon motor – power, speed and endurance

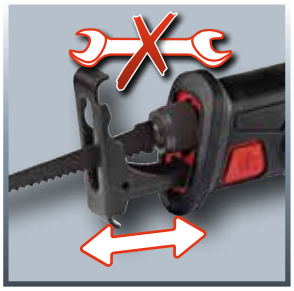

No tools required to change saw blade and adjust soleplate

CORDLESS HAND-HELD CIRCULAR SAW

TE-CS 18 Li

SOLO

NEW!



POWER X CHANGE

CE

Battery pack	Compatible with Power X-Change
Idling speed	4200 min^{-1}
Saw blade	150 x 10 mm
Number of teeth	24
Cutting depth 90°	48 mm
Cutting depth 45°	32 mm
Standard accessories	Parallel guide, key for changing the saw blade
Net weight | gross weight	n/a
Packing dimensions	570 x 345 x 225 mm
Packaging unit	2
Article number	43.312.00
EAN code	4 006825 612394

CORDLESS PENDULUM JIGSAW

TE-JS 18 Li

SOLO



DE: rating "Very good"

POWER X CHANGE

CE

Battery pack	Compatible with Power X-Change
Bevel cuts, max.	47°
Blade speed	0 – 2400 min^{-1}
Cutting depth (wood/plastic/steel)	80 / 12 / 10 mm
Pendulum action	4 levels (3 + 0)
Stroke height	25 mm
Standard accessories	Parallel guide, attachable cutting line guide, dust extraction adapter, chip guard
Net weight | gross weight	1.8 kg | 2.3 kg
Packing dimensions	238 x 90 x 227 mm
Packaging unit	5
Article number	43.212.00
EAN code	4 006825 601398



Simple, tool-free adjustment of cut depth and angle



High-grade LED light



Special stroke makes exact or particularly fast cuts possible



Universal saw blade holder / tool-free saw blade change



Compact, handy and ergonomic design



Compatible with Einhell guide rail system



Perfect view of the workpiece: Dust blow-off function and LED lamp



Plastic insert greatly reduces splintering on the workpiece surface

CORDLESS ANGLE GRINDER

TE-AG 18 Li

NEW!



selber machen PRAXISTEST SEHR GUT Einhell TE-AG 18 Li Heft 11/2015

DE: rating "Very good"

POWER X CHANGE

Battery pack	18 V / 3000 mAh / Li-Ion
Speed	8500 min^{-1}
Disc diameter	115 mm
Standard accessories	Key (storage compartment in additional handle), system battery, charger, transport and storage case
	Cutting disc not included
Net weight | gross weight	2.3 kg | 3.2 kg
Packing dimensions	315 x 145 x 145 mm
Packaging unit	n/a
Article number	44.311.13
EAN code	4 006825 610345



Extensive safety package: restart safeguard, softstart function and overload cut-out



Slimline design for comfortable and ergonomic operation



Greatly reduced vibrations thanks to separation of motor and gearing.



Lightest angle grinder in its class

CORDLESS ANGLE GRINDER

TE-AG 18 Li - Solo

Item identical to TE-AG 18 Li, but without system battery and fast charger



Art. No.	44.311.10
PU	6
EAN code	4 006825 602593

CORDLESS MULTI SANDER

TE-OS 18 Li

SOLO



Battery pack	Compatible with Power X-Change
Vibrations	24000 min^{-1}
Oscillating circuit	1.6 mm
Sanding area	104 cm^2
Abrasive paper size	150 x 150 x 100 mm
Standard accessories	6 abrasive paper (3x 120 K, 3x 240 K), dust extractor adapter
Net weight | gross weight	0.8 kg | 1.1 kg
Packing dimensions	240 x 110 x 144 mm
Packaging unit	8
Article number	44.607.10
EAN code	4 006825 602609



With "Extreme Fix" Velcro fastening for quick and secure fastening of abrasive paper



Soft grip molded to the palm of the hand



Efficient dust extractor and filter box for added cleanliness



Robust solid metal impeller for smooth and quiet action

Einhell Germany AG

POWER X CHANGE FAMILY



BOOSTED BY
TWIN PACK©
2 x 18 V = 36 V SUPERPOWER

CORDLESS LIGHT

TE-CL 18 Li

SOLO



POWER X CHANGE

Battery pack	Compatible with Power X-Change
Light source	3 high-performance LEDs
Luminosity	270 Lumen
Burn time	8 h (1.5 Ah) 16 h (3.0 Ah) 32 h (5.2 Ah)
Net weight | gross weight	0.17 kg | 0.21 kg
Packing dimensions	90 x 50 x 180 mm
Packaging unit	60
Article number	45.141.10
EAN code	4 006825 600032

CORDLESS LIGHT

TE-CL 18 Li H

SOLO

NEW!



POWER X CHANGE

CE

Battery pack	Compatible with Power X-Change
Light source	LED of the company CREE Ltd.
Luminosity	280 Lumen
Burn time	7 h (1.5 Ah) 14 h (3.0 Ah) 30 h (5.2 Ah)
Net weight | gross weight	0.2 kg | 0.3 kg
Packing dimensions	80 x 75 x 243 mm
Packaging unit	8
Article number	45.141.30
EAN code	4 006825 610451



Ultra-long burn time (up to 32 hrs)



Adjustable cone of light



High quality LED of the company CREE Ltd.



High flexibility thanks to a swiveling head



Variable angle adjustment



High luminosity



Practical metal hook



Optimum illumination thanks to the diffusion angle of up to 33 m

CORDLESS RADIO

TE-CR 18 Li

SOLO

NEW!





POWER X CHANGE

CE

Battery pack	Compatible with Power X-Change
Frequency AM	522 – 1620
Frequency FM	87.5 – 108
Storage space for 10 radio stations	10/10 (FM/AM)
Standard accessories	AUX in connector
Net weight | gross weight	0.6 kg | 0.8 kg
Packing dimensions	140 x 95 x 220 mm
Packaging unit	4
Article number	34.080.15
EAN code	4 006825 609196



10 storage spaces for radio stations



Practical rear side storage facility



Facility for mounting on the wall



AUX-in connector can be used to connect a mobile phone or an MP3 player

USB POWER BANK

TE-CP 18 Li USB

SOLO

NEW!





POWER X CHANGE

CE

Battery pack	Compatible with Power X-Change
Rated voltage	18 V
Amount of USB ports	2
Output of USB port 1	1.0 A
Output of USB port 2	2.1 A
Net weight | gross weight	0.1 kg | 0.1 kg
Packing dimensions	81 x 56 x 120 mm
Packaging unit	64
Article number	45.141.20
EAN code	4 006825 608878




Practical and mobile - external power source for charging battery-powered devices



2 USB ports for charging two devices simultaneously (incl. 1 port for fast charging)



Power source for charging other, smaller rechargeable batteries



Power source for charging a mobile phone, tablet, MP3 player, ...

POWER X-CHANGE-STARTER-KIT

Set comprising 1.5 Ah system battery and high-speed system charger 18 V (charging time 30 min)



Art. No. 45.120.21
PU 12
EAN code 4 006825 601350

POWER X-CHANGE CHARGE

fast charger 18 V, charging time 30 min



Art. No. 45.120.11
PU 8
EAN code 4 006825 587029

POWER X-CHANGE

system battery 18 V / 1.5 Ah



Art. No. 45.113.40
PU 24
EAN code 4 006825 590586

POWER X-CHANGE

system battery 18 V / 2.0 Ah

NEW!



Art. No. 45.113.95
PU 24
EAN code 4 006825 610369

POWER X-CHANGE

system battery 18 V / 3.0 Ah



Art. No. 45.113.41
PU 24
EAN code 4 006825 590593

POWER X-CHANGE

system battery 18 V / 4.0 Ah

NEW!



Art. No. 45.113.96
PU 24
EAN code 4 006825 610376

POWER X-CHANGE

system battery 18 V / 5.2 Ah



Art. No. 45.113.57
PU 12
EAN code 4 006825 598865

AKKU-TOP

Einhell recommends accessories supplied by kwb GERMANY

www.kwb.eu

THE NEW KWB ACCESSORIES FOR CORDLESS MACHINES
AND MAINS-POWERED ELECTRICAL TOOLS.


All the benefits at a glance:

+ Innovative design makes working easier
+ Saves time - so you can work for longer on one battery charge
+ Less strain on cordless tool
+ Sawdust removed quicker
+ More rapid sawing
+ Work more efficiently and save time

Work up to 30 % faster



Save up to 30 % energy

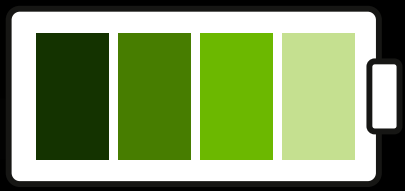



SUITABLE FOR EINHELL POWER X-CHANGE TOOLS



Made in Europe

FCE Hardwood Drill Bit with TwinLand® groove design.
For bangkirai, hardwoods and softwoods

ENERGY SAVING 30%



Made in Germany

Reciprocating saw with patented sawblade geometry for plenty of additional cutting pressure - for use with hardwoods and softwoods, laminate, parquet, nonferrous metals and wood with metal residues

ENERGY SAVING 20%




Made in Germany

Saber saw with patented sawblade geometry for plenty of additional cutting pressure - for use with hardwoods and softwoods, framing timber, dry greenheart, nonferrous metals and wood with metal residues

ENERGY SAVING 23%





ENERGY SAVING 20%

AGGRESSO-FLEX® Diamond Cutting Disks
Ultra-thin cutting edge, turbo-shaped, suitable for concrete, tiles, stoneware and artificial stone



ENERGY SAVING 25%

Multi-blade hole sawing attachment with patented flutes, supplied with 8 or 7 blades, for wood, chipboard and plasterboard

selbst ist der Mann
SELBST AUSPROBIERT
FAZIT: TTTTT
www.selbst.de

DE: rating "Very good"

SCREWING

We put the screws on the price. But it can drill too...



Andreas Wieser
(Section Manager Product Tests/ Sample Store, Einhell Germany AG)

With my new Einhell lithium-ion cordless screwdriver I am always prepared for any job in the house and garden. Virtually no self-discharge and no memory effect! It always works to full capacity and it is small, light and handy. It is a pleasure to work with! Incidentally: my son absolutely loved his new playhouse!

CORDLESS SCREWDRIVER

TC-SD 3,6 Li

NEW!



Battery pack	3.6 V / 1300 mAh / Li-Ion
Speed	200 min^{-1}
Torque	3 Nm
Charging time	3 – 5 h
Torque selector settings	19 + 1
Standard accessories	6 bits, charging cable
Net weight | gross weight	0.4 kg | 0.9 kg
Packing dimensions	246 x 60 x 225 mm
Packaging unit	20
Article number	45.134.42
EAN code	4 006825 604733



Turnable handle



Ergonomic softgrip



LED battery capacity indicator



incl. 6 bits

Note: For safe handling of the products please refer to the instructions in the operating manual.

CORDLESS SCREWDRIVER

TE-SD 3,6 Li



DE: rating "Very good"



Identical in construction to the tested RT-SD 3,6/1 Li

Battery pack	3.6 V / 1500 mAh / Li-Ion
Speed	200 min^{-1}
Torque	3.5 Nm
Charging time	3 h
Standard accessories	9 bits, charger station with bit depot
Net weight | gross weight	0.4 kg | 1.2 kg
Packing dimensions	245 x 190 x 90 mm
Packaging unit	10
Article number	45.134.90
EAN code	4 006825 580150



+ 30% capacity



Turnable handle



Torque selector settings



Charger station

Li-Ion Power & Protection

LITHIUM-ION TECHNOLOGY FROM EINHELL

Ready for use at any time.

Rechargeable lithium-ion batteries are not afflicted by self-discharge. Nor do they suffer from memory effect. They can be charged without any problems at any time – even after a long period of disuse. Say goodbye to the days when a flat battery put paid to your project – always ready for action!

Full power.

The lithium-ion system guarantees that the full capacity is always available – all (battery) life long!

Small – light – handy.

Rechargeable lithium-ion batteries are much smaller and lighter than nickel-cadmium batteries of the same capacity. This makes light work of the various jobs – so you can work for hours without feeling the strain.

Special protection – long life.

Special protective mechanisms (e.g. continuous monitoring of voltage and temperature) lengthen the service life of Einhell rechargeable lithium-ion batteries.

CORDLESS SCREWDRIVER

TE-SD 3,6 Li KIT

Item identical to TE-SD 3.6 Li, but supplied in practical storage box and with 32-piece bit set



Art. No.	45.134.95
PU	18
EAN code	4 006825 598575

Testberichte.de
QUALITÄTS MARKE
2015

Einhell
Akkuschrauber

AS CONFIRMED BY CONSUMER TESTING AGENCY TESTBERICHTE.DE: EINHELL IS A QUALITY BRAND

Rated first class in Cordless Screwdriver category

In July 2015, the consumer portal testberichte.de named Einhell a "2015 Quality Brand" in the Cordless Screwdriver category.

testberichte.de›s Quality Brand award is given to manufacturers who regularly achieve above-average scores in independent tests conducted by trade magazines. The award is proof of Einhell Germany's top class product portfolio and the outstanding product quality offered by the company.

testberichte.de is Germany's biggest independent online platform for professional consumer product testing and comparison; it does not test the products itself but lists test results from more than 650 German language test magazines.

EINHELL. WELL DONE.

CORDLESS DRILL

TH-CD 12 Li



Battery pack	12 V / 1300 mAh / Li-Ion
Torque	22 Nm
Gears	1-speed gearbox
Speed	0 – 400 min^{-1}
Torque selector settings	19 + 1
Drill chuck	10 mm
Charging time	3 – 5 h
Standard accessories	Battery pack, charger
Net weight | gross weight	1.0 kg | 1.5 kg
Packing dimensions	198 x 67 x 193 mm
Packaging unit	10
Article number	45.136.50
EAN code	4 006825 592320



Magnetic bit/screw holder



Quick-change chuck



20-step torque selector



Ergonomic softgrip

CORDLESS DRILL

TH-CD 12-2 Li



Battery pack	12 V / 1300 mAh / Li-Ion
Torque	24 Nm
Gears	2-speed gearbox
Speed	0 - 350 min^{-1} / 0 - 1300 min^{-1}
Torque selector settings	19 + 1
Drill chuck	10 mm (single sleeve)
Charging time	3-5 h
Standard accessories	Charger, transport and storage case
Net weight | gross weight	1.0 kg | 2.0 kg
Packing dimensions	280 x 220 x 79 mm
Packaging unit	5
Article number	45.136.60
EAN code	4 006825 592436

CORDLESS DRILL

TC-CD 12 Li



Battery pack	12 V / 1300 mAh / Li-Ion
Torque	20 Nm
Gears	2-speed gearbox
Speed	0 – 300 min^{-1} / 0 – 1050 min^{-1}
Torque selector settings	17 + 1
Drill chuck	10 mm (single sleeve), removable
Charging time	1 h
Standard accessories	System battery, 1h fast charger, removable drill chuck, transport and storage case
Net weight | gross weight	1.1 kg | 2.1 kg
Packing dimensions	283 x 243 x 85 mm
Packaging unit	5
Article number	45.132.06
EAN code	4 006825 599060



Drilling and screwing



Quick-change chuck



2-speed high-performance gearbox



Single-sleeve drill chuck with spindle lock



20-step torque selector



Ergonomic softgrip



Removable chuck to shorten the tool and reduce weight



Ergonomic softgrip

CORDLESS DRILL

TE-CD 12 Li

WITH 2ND BATTERY PACK



DE: "Best tool" DE: rating "Good"

Battery pack	12 V / 1300 mAh / Li-Ion
Torque	25 Nm
Gears	2-speed gearbox
Speed	0 – 350 min^{-1} / 0 – 1300 min^{-1}
Torque selector settings	17 + 1
Drill chuck	10 mm (single-sleeve)
Charging time	1 h
Standard accessories	2nd battery pack, 1 h fast charger, transport and storage case
Net weight | gross weight	1.0 kg | 2.4 kg
Packing dimensions	330 x 265 x 95 mm
Packaging unit	5
Article number	45.136.02
EAN code	4 006825 588583

CORDLESS DRILL

TE-CD 12 X-Li

WITH 2ND BATTERY PACK



DE: rating "Price tip"

DE: price/performance "Good – Very good"

Battery pack	12 V / 1300 mAh / Li-Ion
Torque	25 Nm
Gears	2-speed gearbox
Speed	0 – 350 min^{-1} / 0 – 1300 min^{-1}
Torque selector settings	17 + 1
Drill chuck	10 mm (single-sleeve), removable
Charging time	1 h
Standard accessories	2nd battery pack, 1 h fast charger, 10 Bits, removable drill chuck, transport and storage case
Net weight | gross weight	1.0 kg | 2.7 kg
Packing dimensions	330 x 265 x 95 mm
Packaging unit	5
Article number	45.136.03
EAN code	4 006825 592962




2-speed high-performance gearbox




Single-sleeve drill chuck with spindle lock



Short, ergonomic design



1 h fast charger with Einhell ABS




Small and easy to use with removable chuck



2-speed high-performance gearbox



Single-sleeve drill chuck with quick stop



1 h fast charger with Einhell ABS

CORDLESS DRILL

TH-CD 14,4-2 2B Li

WITH 2ND BATTERY PACK



Battery pack	14.4 V / 1300 mAh / Li-Ion
Torque	33 Nm
Gears	2-speed gearbox
Speed	0 – 350 min^{-1} / 0 – 1150 min^{-1}
Torque selector settings	19 + 1
Drill chuck	10 mm (single-sleeve)
Charging time	3 – 5 h
Standard accessories	2nd battery pack, charger, transport and storage case
Net weight | gross weight	1.4 kg | 3.1 kg
Packing dimensions	305 x 295 x 105 mm
Packaging unit	5
Article number	45.136.71
EAN code	4 006825 592511



2-speed gear: for drilling and screw fixings



Easy tool-change



Ergonomic softgrip



Robust metal gearbox

Einhell Germany AG

CORDLESS DRILL
TE-CD 12 Li
Item identical to 45.136.02, but without 2nd system battery



Art. No. 45.136.00
PU 5
EAN code 4 006825 586466

CORDLESS DRILL
TH-CD 14,4-2 Li
Item identical to 45.136.71, but without 2nd system battery



Art. No. 45.136.70
PU 5
EAN code 4 006825 592504

BIT-SET
23 pieces



Art. No. 42.580.73
PU 72
EAN code 4 006825 573268

DRILL AND BIT KIT
70 pieces



Art. No. 42.580.85
PU 10
EAN code 4 006825 563610

CORDLESS DRILL

TE-CD 14,4-2 Li 2B

WITH 2ND BATTERY PACK



DE: price/performance "very good"

Identical in construction to the tested RT-CD 14,4/1 Li

DE: rating "Good"

Identical in construction to the tested RT-CD 14,4/1 Li

Battery pack	14.4 V / 1300 mAh / Li-Ion
Torque	38 Nm
Gears	2-speed gearbox
Speed	0 – 310 min^{-1} / 0 – 1300 min^{-1}
Torque selector settings	23 + 1
Drill chuck	10 mm (single-sleeve)
Charging time	1 h
Standard accessories	2nd battery pack, 1h fast charger, transport and storage case
Net weight | gross weight	1.4 kg | 4.2 kg
Packing dimensions	380 x 110 x 340 mm
Packaging unit	4
Article number	45.132.98
EAN code	4 006825 577631

CORDLESS DRILL


NEW!

TC-CD 18-2 Li

WITH 2ND BATTERY PACK



Battery pack	18 V / 1300 mAh / Li-Ion
Torque	38 Nm
Gears	2-speed gearbox
Speed	0 – 350 min^{-1} / 0 – 1250 min^{-1}
Torque selector settings	18 + 1
Drill chuck	10 mm (single-sleeve)
Charging time	3 – 5 h
Standard accessories	2nd battery pack, charger, transport and storage case
Net weight | gross weight	1.4 kg | 3.0 kg
Packing dimensions	300 x 95 x 290 mm
Packaging unit	5
Article number	45.138.20
EAN code	4 006825 607000




Direction indicator



LED battery capacity indicator



Sturdy 2-speed gearbox: for drilling and screwfi xings



Easy tool-change




90° stop faces



1h fast charger with Einhell ABS



LED battery indicator



Battery technology with Einhell ABS

CORDLESS DRILL

TE-CD 18 Li Brushless

SOLO

NEW!



POWER X CHANGE

CE

Battery pack	Compatible with Power X-Change
Torque	60 Nm
Gears	2-speed gearbox
Speed	0 - 500 min^{-1} / 0 - 1800 min^{-1}
Torque selector settings	19 + 1
Drill chuck	13 mm (single sleeve)
Standard accessories	Additional handle
Net weight | gross weight	1.1 kg | 1.3 kg
Packing dimensions	235 x 196 x 76 mm
Packaging unit	5
Article number	45.138.50
EAN code	4 006825 610130



High quality quick-change chuck made of metal



Brushless motor for longer operating times and more power



High-grade LED light



Safe grip thanks to additional handle



BRUSHLESS MOTORS

Brushless motors – the next generation power source for powerful DIY tools

Product development with a punch

Brushless motors are more effective than brushed electric motors and therefore perform better - that's why this new development really packs a punch!

Longer operating times

Brushless motors have up to 50 % more battery life per charge and therefore cause fewer interruptions to the work and make light work of lengthy jobs in the home and garden.

Long service life

Since they are so highly effective, brushless motors do not heat up during use like other motors, keeping wear and tear to a minimum and guaranteeing a longer service life.

CORDLESS DRILL

RT-CD 14,4/1 Li

Item identical to 45.132.98, but without 2nd system battery



Art. No.	45.132.95
PU	4
EAN code	4 006825 573343

BIT-SET

23 pieces



Art. No.	42.580.73
PU	72
EAN code	4 006825 573268

DRILL AND BIT KIT

70 pieces



Art. No.	42.580.85
PU	10
EAN code	4 006825 563610

CORDLESS DRILL

TE-CD 18 Li



TECHNIK ZU HAUSE.de
sehr gut

DE: rating "Very Good"

Battery pack	18 V / 1500 mAh / Li-Ion
Torque	48 Nm
Gears	2-speed gearbox
Speed	0 – 320 min^{-1} / 0 – 1350 min^{-1}
Torque selector settings	23 + 1
Drill chuck	10 mm (single sleeve)
Charging time	30 min
Standard accessories	System battery 1.5 Ah, 30 min fast charger, transport and storage case
Net weight | gross weight	1.5 kg | 3.7 kg
Packing dimensions	420 x 335 x 105 mm
Packaging unit	4
Article number	45.136.90
EAN code	4 006825 592986




30 min fast charger



Direction indicator



Single-sleeve quick-change chuck



Battery technology with Einhell ABS

CORDLESS DRILL

TE-CD 18 Li

with second system battery
Item identical to TE-CD 18 Li, but with second system battery



Art. No. 45.136.87
PU 8
EAN code 4 006825 602708

CORDLESS DRILL

TE-CD 18 Li - Solo

Item identical to TE-CD 18 Li, but without system battery and fast charger



Art. No. 45.136.92
PU 8
EAN code 4 006825 593327

CORDLESS DRILL

TE-CD 18/2 Li

WITH 2ND BATTERY PACK

NEW!



Battery pack	18 V / 1500 mAh / Li-Ion
Torque	44 Nm
Gears	2-speed gearbox
Speed	0 – 350 min^{-1} / 0 – 1250 min^{-1}
Torque selector settings	20 + 1
Drill chuck	10 mm (single-sleeve)
Charging time	30 min
Standard accessories	2nd battery pack, 30 min fast charger, transport and storage case
Net weight | gross weight	1.4 kg | 4.0 kg
Packing dimensions	325 x 100 x 330 mm
Packaging unit	5
Article number	45.138.30
EAN code	4 006825 607321



Single-sleeve quick-change chuck



2-speed metal gearbox



High-grade LED light



Slim and ergonomic design with soft grip

Einhell Germany AG

POWER X CHANGE FAMILY



BOOSTED BY
TWIN PACK©
2 x 18 V = 36 V SUPERPOWER

CORDLESS IMPACT DRILL

TC-CD 18-2 Li-i

NEW!



Battery pack	18 V / 1500 mAh / Li-Ion
Torque	40 Nm
Gears	2-speed gearbox
Speed	0-350 min^{-1} / 0-1250 min^{-1}
Blow rate	0-5250 min^{-1} / 0-18750 min^{-1}
Torque selector settings	18 + 1 + 1
Drill chuck	13 mm (single sleeve)
Charging time	1 h
Standard accessories	2nd battery pack, charger, transport and storage case
Net weight | gross weight	1.5 kg | 3.3 kg
Packing dimensions	310 x 100 x 295 mm
Packaging unit	5
Article number	45.138.25
EAN code	4 006825 610468



Screw fixings, drilling, hammer drilling



High-quality 13 mm quick-change drill chuck made of metal



2-speed metal gearbox



High-grade LED light

CORDLESS IMPACT DRILL

TE-CD 18 Li-i Brushless

SOLO

NEW!



POWER X CHANGE

Battery pack	Compatible with Power X-Change
Torque	60 Nm
Gears	2-speed gearbox
Speed	0 - 500 min^{-1} / 0-1800 min^{-1}
Blow rate	0 - 9350 min^{-1} / 0 - 31500 min^{-1}
Torque selector settings	19 + 1 + 1
Drill chuck	13 mm (single sleeve)
Standard accessories	Additional handle
Net weight | gross weight	1.4 kg | 1.7 kg
Packing dimensions	250 x 200 x 74 mm
Packaging unit	5
Article number	45.138.60
EAN code	4 006825 612417



High quality quick-change chuck made of metal



Brushless motor for longer operating times and more power



Screw fixings, drilling, hammer drilling



Safe grip thanks to additional handle

CORDLESS IMPACT DRILL

TE-CD 18-2 Li-i



POWER X CHANGE

CE

Battery pack	18 V / 1500 mAh / Li-Ion
Torque	48 Nm
Gears	2-speed gearbox
Speed	0 – 320 min^{-1} / 0 – 1350 min^{-1}
Blow rate	0 - 5120 min^{-1} / 0 - 21600 min^{-1}
Torque selector settings	23 + 1 + 1
Drill chuck	13 mm (single sleeve)
Charging time	30 min
Standard accessories	System battery 1.5 Ah, 30 min fast charger, additional handle, metal depth stop, transport and storage case
Net weight | gross weight	1.8 kg | 4.0 kg
Packing dimensions	420 x 335 x 105 mm
Packaging unit	4
Article number	45.138.00
EAN code	4 006825 596472




Screw fixings, drilling, hammer drilling



Large 13 mm quick-change chuck



Handy belt clip



Battery technology with Einhell ABS

Einhell Germany AG

CORDLESS IMPACT DRILL

TE-CD 18-2 Li-i - Solo

Identical to TE-CD 18-2 Li-i, but without system battery and fast charger



Art. No. 45.138.02
PU 8
EAN code 4 006825 596779

BIT-SET

23 pieces



Art. No. 42.580.73
PU 72
EAN code 4 006825 573268

DRILL AND BIT KIT

70 pieces



Art. No. 42.580.85
PU 10
EAN code 4 006825 563610

CORDLESS IMPACT DRIVER

TE-CI 18 Li





DE: rating "Very good"

Battery pack	**18 V / 1500 mAh / Li-Ion**
Speed	**0 – 2300 min^{-1}**
Torque	**140 Nm**
Charging time	**30 min**
Gears	**1-speed gearbox**
Hexagon fitting	**6.35 mm (1/4")**
Standard accessories	**System battery 1.5 Ah, 30 min fast charger, transport and storage case**
Net weight | gross weight	**1.4 kg | 3.4 kg**
Packing dimensions	**330 x 110 x 308 mm**
Packaging unit	**5**
Article number	**45.100.20**
EAN code	4 006825 601763



The unrivaled Triathlon motor – power, speed and endurance



Special mechanism to reduce impact on the joints from screwing action



High-quality, robust design



Short, ergonomic design with soft grip

CORDLESS IMPACT DRIVER

TE-CI 18 Li

Item identical to TE-CI 18 Li, but with 3.0 Ah system battery



Art. No.	**45.100.21**
PU	**5**
EAN code	4 006825 601794

CORDLESS IMPACT DRIVER

TE-CI 18 Li - Solo

Item identical to TE-CI 18 Li, but without system battery and fast charger



Art. No.	**45.100.23**
PU	**10**
EAN code	4 006825 603507



Note: For safe handling of the products please refer to the instructions in the operating manual.

NICKEL-CADMIUM BATTERIES

Einhell nickel-cadmium batteries

Quality comes from experience.

The great benefit you get with nickel-cadmium batteries is Einhell's long-standing experience with this type of battery. No more surprises on the job or in the handling with this impressive and robust battery.

Extremely durable.

Unlike other similar battery systems, nickel-cadmium batteries have one distinctive quality - they are considerably more tolerant of deep discharge.

Excellent performance at low temperatures.

The high resistance of NiCd batteries comes into its own at low temperatures, making easy work of outside jobs.

CORDLESS DRILL

TC-CD 12-2




CE

Battery pack	12 V / 1100 mAh / NiCd
Speed	0 – 350 min^{-1} / 0 – 1100 min^{-1}
Torque selector settings	14 Nm / 19 + 1
Charging time	3 – 5 h
Gears	2-speed gearbox
Drill chuck	10 mm (double sleeve)
Standard accessories	Charger, transport and storage case
Net weight | gross weight	1.5 kg | 2.9 kg
Packing dimensions	290 x 305 x 115
Packaging unit	5
Article number	45.135.20
EAN code	4 006825 581546



2-speed high-performance gearbox



Double sleeve drill chuck with quick stop



20-fold torque settings



Magnetic bit/screw holder


CORDLESS DRILL

TC-CD 14,4 2B

WITH 2ND BATTERY PACK



Battery pack	14.4 V / 1100 mAh / NiCd
Speed	0 – 550 min^{-1}
Torque / Torque selector settings	18 Nm / 19 + 1
Charging time	3 - 5 h
Gears	1-speed gearbox
Drill chuck	10 mm (double sleeve)
Standard accessories	2nd battery pack, charger
Net weight | gross weight	1.5 kg | 2.7 kg
Packing dimensions	230 x 250 x 90 mm
Packaging unit	10
Article number	45.135.40
EAN code	4 006825 581577



Quickstop



High torque motor



Magnetic bit/screw holder



Soft grip

CORDLESS DRILL

TC-CD 14,4-2 2B

WITH 2ND BATTERY PACK



Battery pack	14.4 V / 1200 mAh / NiCd
Speed	0 – 350 min^{-1} / 0 – 1100 min^{-1}
Torque / Torque selector settings	24 Nm / 19 + 1
Charging time	3 – 5 h
Gears	2-speed gearbox
Drill chuck	10 mm
Standard accessories	2nd battery pack, charger, transport and storage case
Net weight | gross weight	1.5 kg | 3.8 kg
Packing dimensions	385 x 305 x 103 mm
Packaging unit	5
Article number	45.135.35
EAN code	4 006825 581560



2-speed high-performance gearbox



High-torque motor



Quickstop



Soft grip

CORDLESS DRILL

TC-CD 18-2 2B

WITH 2ND BATTERY PACK



Battery pack	18 V / 1200 mAh / NiCd
Speed	0 – 350 min^{-1} / 0 – 1100 min^{-1}
Torque / Torque selector settings	30 Nm / 19 + 1
Charging time	3 – 5 h
Gears	2-speed gearbox
Drill chuck	10 mm
Standard accessories	2nd battery pack, charger, transport and storage case
Net weight | gross weight	1.7 kg | 4.1 kg
Packing dimensions	385 x 305 x 103 mm
Packaging unit	5
Article number	45.135.50
EAN code	4 006825 582376



2-speed high-performance gearbox



High-torque motor



Quickstop



Battery capacity indicator

CORDLESS DRILL

TH-CD 18-2

Item identical to TC-CD 18-2 2B, but without 2nd system battery



Art. No.	45.135.45
PU	5
EAN code	4 006825 582369

BIT-SET

23 pieces



Art. No.	42.580.73
PU	72
EAN code	4 006825 573268

DRILL AND BIT KIT

70 pieces



Art. No.	42.580.85
PU	10
EAN code	4 006825 563610

CORDLESS DRILL

TC-CD 18-2 1h

WITH 2ND BATTERY PACK



Battery pack	18 V / 1200 mAh / NiCd
Speed	0 – 350 min^{-1} / 0 – 1100 min^{-1}
Torque / Torque selector settings	30 Nm / 19 + 1
Charging time	1 h
Gears	2-speed gearbox
Drill chuck	10 mm
Standard accessories	2nd battery pack, 1 h fast charger, transport and storage box
Net weight | gross weight	1.2 kg | 4.3 kg
Packing dimensions	390 x 315 x 105 mm
Packaging unit	5
Article number	45.135.55
EAN code	4 006825 582383

CORDLESS IMPACT DRILL

TC-CD 18-2 i



Battery pack	18 V / 1200 mAh / NiCd
Speed	0 – 300 min^{-1} / 0 – 900 min^{-1}
Torque / Torque selector settings	30 Nm / 19 + 1
Charging time	1 h
Gears	2-speed gearbox
Drill chuck	13 mm
Standard accessories	2nd battery pack, 1 h fast charger, transport and storage case
Net weight | gross weight	2.0 kg | 4.5 kg
Packing dimensions	390 x 103 x 310 mm
Packaging unit	5
Article number	45.135.62
EAN code	4 006825 594393



1 hour fast charger



2-speed metal gearbox



Also suitable for drilling into masonry



2-speed metal gearbox



Battery capacity indicator




High-torque motor



Quick and easy tool-change



Battery capacity indicator



AUTO-START-STOP

Fast - practical - powerful.

The Auto Start-Stop gear enables particularly fast screw operations. The motor is disconnected from the bit holder - the spindle only turns if the screw is pressed. The motor remains at the speed range and the screws are screwed in in next to no time.

Consistent screw depth - clean result.

The infinitely adjustable depth stop stops the screwing-in process, ensuring consistent and precise screw depths.

DRYWALL SCREW GUN

TH-DY 500 E




Mains connection	230 V ~ 50 Hz
Power rating	500 W
Speed	0 – 2200 min^{-1}
Tool chuck	6.35 mm (¼“) internal hexagon
Net weight | gross weight	1.7 kg | 2.1 kg
Packing dimensions	315 x 230 x 75 mm
Packaging unit	5
Article number	42.599.05
EAN code	4 006825 587821



Robust aluminium gear head



Precise screw depth adjustment

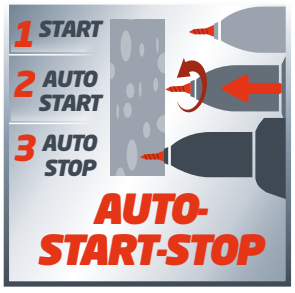

Auto start/stop gearing



Handy belt clip

They make holes in walls and ceilings – not in your wallet.



Christian Boldinger
(Marketing Service,
Einhell Germany AG)

One of my friends has been building his own house for the last three months. Naturally I like to do my bit as a good friend and help him out at the weekends. My Einhell hammer drill always goes with me as my trusty weapon for long and arduous DIY missions. It keeps us in high spirits on the building site – and the house-warming party is fast approaching!

Note: For safe handling of the products please refer to the instructions in the operating manual.

IMPACT DRILL

TE-ID 500 E



Mains connection	230 – 240 V ~ 50 Hz
Power rating	550 W
Gears	1-speed gearbox
Speed	0 – 3000 min^{-1}
Drilling capacity (wood/concrete/steel)	25 / 10 / 8 mm
Blow rate	0 – 48000 min^{-1}
Drill chuck	13 mm
Standard accessories	Metal depth stop, additional handle, transport and storage case
Net weight | gross weight	1.7 kg | 3.2 kg
Packing dimensions	328 x 97 x 295 mm
Packaging unit	4
Article number	42.596.10
EAN code	4 006825 591347

IMPACT DRILL

TC-ID 650 E



Mains connection	230 V ~ 50 Hz
Power rating	650 W
Gears	1-speed gearbox
Speed	0 – 2600 min^{-1}
Drilling capacity (wood/concrete/steel)	25 / 13 / 10 mm
Blow rate	0 – 41600 min^{-1}
Drill chuck	13 mm
Standard accessories	Metal depth stop, additional handle
Net weight | gross weight	1.8 kg | 2.2 kg
Packing dimensions	282 x 68 x 225 mm
Packaging unit	10
Article number	42.586.82
EAN code	4 006825 602166



Quality chuck with locking function



Small, easy-to-use design



Practical belt hook to keep your hands free



Robust metal depth stop



Large ergonomic soft grip surfaces



Simple speed setting control



2 functions: drilling and hammer drilling



Simple speed setting control

IMPACT DRILL

RT-ID 65/1



DE: price/performance very good"

DE: "Test winner"

Mains connection: 230 – 240 V ~ 50 Hz
Power rating: 650 W
Gears: 1-speed gearbox
Speed: 0 – 3000 min^{-1}
Drilling capacity (wood/concrete/steel): 25 / 13 / 10 mm
Blow rate: 0 – 48000 min^{-1}
Drill chuck: 13 mm
Standard accessories: Metal depth stop, additional handle, transport and storage case
Net weight | gross weight: 2.1 kg | 3.7 kg
Packing dimensions: 340 x 348 x 120 mm
Packaging unit: 5
Article number: 42.597.35
EAN code: 4 006825 565690



Quality chuck and spindle lock



3 functions: screw fixings, drilling, hammer drilling



Additional handle with drill bit depot



Simple speed setting control

Einhell Germany AG

DRILL AND BIT KIT

70 pieces



Art. No. 42.580.85
PU 10
EAN code: 4 006825 563610



IMPACT DRILL

TC-ID 710 E



CE

Mains connection	230 V ~ 50 Hz
Power rating	710 W
Gears	1-speed gearbox
Speed	0 – 2700 min^{-1}
Drilling capacity (wood/concrete/steel)	25 / 13 / 10 mm
Blow rate	0 – 43200 min^{-1}
Drill chuck	13 mm
Standard accessories	Metal depth stop, additional handle
Net weight | gross weight	2.1 kg | 2.3 kg
Packing dimensions	307 x 78 x 240mm
Packaging unit	6
Article number	42.597.61
EAN code	4 006825 602173



Robust metal depth stop



2 functions: drilling and hammer drilling



Electronic speed control



Additional handle

Note: For safe handling of the products please refer to the instructions in the operating manual.

IMPACT DRILL

TC-ID 720 E





DE: rating "Good - Very Good"

CE

Mains connection	**230 – 240 V ~ 50 Hz**
Power rating	**720 W**
Gears	**1-speed gearbox**
Speed	**0 – 2700 min^{-1}**
Drilling capacity (wood/concrete/steel)	**30 / 13 / 10 mm**
Blow rate	**0 – 43200 min^{-1}**
Drill chuck	**13 mm**
Standard accessories	**Metal depth stop, additional handle**
Net weight | gross weight	**2.0 kg | 2.4 kg**
Packing dimensions	**325 x 80 x 242 mm**
Packaging unit	**5**
Article number	**42.598.19**
EAN code	4 006825 596960



Quick chuck with locking function



Additional handle with anti-twist protection



Electronic speed control



Large ergonomic soft grip surfaces

Einhell Germany AG

DRILL AND BIT KIT

70 pieces



Art. No.	**42.580.85**
PU	**10**
EAN code	4 006825 563610



Without constant electronic control



With constant electronic control

CONSTANT ELECTRONIC CONTROL –
CRUISE CONTROL FOR POWER TOOLS

Always on full power.

Dynamic speed control – for zero speed loss even under load.

Better – safer – faster.

The constant electronic control guarantees consistent speed and smooth drilling action. The result is better, the process is safer, and progress is faster.

IMPACT DRILL
TE-ID 750/1 E
Item identical to TE-ID 750 E, but dust extraction device not included



Art. No.	42.596.71
PU	4
EAN code	4 006825 598568

IMPACT DRILL
TH-ID 1000 KIT
Item identical to TH-ID 1000, but with 50 pcs. drill and bit set



Art. No.	42.598.28
PU	6
EAN code	4 006825 599541

IMPACT DRILL
TE-ID 1050/1 CE
Item identical to TE-ID 1050 CE but dust extraction device not included



Art. No.	42.596.21
PU	2
EAN code	4 006825 598551

IMPACT DRILL
TE-ID 750 E



Mains connection	220 - 240 V ~ 50 Hz
Power rating	750 W
Gears	1-speed gearbox
Speed	0 - 2700 min^{-1}
Drilling capacity (wood/concrete/steel)	30 / 14 / 12 mm
Blow rate	0 - 43200 min^{-1}
Drill chuck	13 mm
Standard accessories	Metal depth stop, additional handle, dust extraction device, transport and storage case
Net weight | gross weight	2.4 kg | 4.0 kg
Packing dimensions	360 x 120 x 285 mm
Packaging unit	4
Article number	42.596.70
EAN code	4 006825 589054



Dust-free drilling



Drill bits easy to change



Simple speed setting control



Additional handle with anti-twist protection

IMPACT DRILL

TH-ID 1000 E



Mains connection	230 V ~ 50 Hz
Power rating	1010 W
Gears	1-speed gearbox
Speed	0 – 3000 min^{-1}
Drilling capacity (wood/concrete/steel)	32 / 16 / 13 mm
Blow rate	0 – 48000 min^{-1}
Drill chuck	13 mm
Standard accessories	Metal depth stop, additional handle
Net weight | gross weight	2.1 kg | 2.6 kg
Packing dimensions	315 x 141 x 235 mm
Packaging unit	8
Article number	42.598.25
EAN code	4 006825 587777

HAMMER DRILL
WITH CONSTANT ELECTRONIC CONTROL SYSTEM

TE-ID 1050 CE



selbst ist der Mann PRAXISTEST
Kurztest 09/2014 selber machen
GUT (2,2)
Ausgabe 1/2014 www.selbst.de
DE: rating "Very Good" DE: rating "Good"

Mains connection	230 V ~ 50 Hz
Power rating	1050 W
Gears	2-speed gearbox
Speed	0 – 1000 min^{-1} / 0 – 2800 min^{-1}
Drilling capacity (wood/concrete/steel)	40 / 16 / 13 mm
Blow rate	0 – 15000 min^{-1} / 0 – 42000 min^{-1}
Drill chuck	13 mm
Standard accessories	Metal depth stop, additional handle, dust extraction device, transport and storage case
Net weight | gross weight	3.0 kg | 5.0 kg
Packing dimensions	400 x 120 x 330 mm
Packaging unit	2
Article number	42.596.20
EAN code	4 006825 591361



Robust metal drill chuck



Additional handle with anti-twist protection



Dust-free drilling



2-speed gear – screwing and drilling



Electronic speed control



Large ergonomic soft grip surfaces



Electronic speed control prevents loss of power



Additional handle with anti-twist protection

POWER X CHANGE FAMILY



BOOSTED BY
TWIN PACK©
2 x 18 V = **36 V SUPERPOWER**

CORDLESS ROTARY HAMMER

TE-HD 18 Li

NEW!



POWER X CHANGE

CE

Battery pack	18 V / 1500 mAh / Li-Ion
Speed	0 – 1100 min^{-1}
Blow rate/strength	0 – 5700 min^{-1} / 1.0 J
Drilling capacity concrete	12 mm
Drill chuck	SDS-plus tool holder
Standard accessories	System battery 1.5 Ah, 30 min fast charger, bit holder, transport and storage case
Net weight | gross weight	1.5 kg | 4.3 kg
Packing dimensions	110 x 330 x 410 mm
Packaging unit	4
Article number	45.138.10
EAN code	4 006825 604047


SDS-plus tool holder


Robust metal gearbox


Simple speed setting control


LED-light

CORDLESS ROTARY HAMMER

TE-HD 18 Li - Solo

Item identical to TE-HD 18 Li, but without system battery and fast charger

NEW!



Art. No. 45.138.12
PU 8
EAN code 4 006825 604054

ROTARY HAMMER

RT-RH 20/1



selbst ist der Mann
SELBST AUSPROBIERT
FAZIT: TTTTT
www.selbst.de
DE: rating "Very Good"

Mains connection	**220 – 240 V ~ 50 Hz**
Power rating	**500 W**
Speed	**0 – 1200 min^{-1}**
Blow rate/strength	**0 – 5800 min^{-1} / 1.6 J**
Drilling capacity concrete	**20 mm**
Drill chuck	**SDS-plus tool holder**
Standard accessories	**Metal depth stop, additional handle, transport and storage case**
Net weight | gross weight	**2.2 kg | 4.5 kg**
Packing dimensions	**350 x 122 x 337 mm**
Packaging unit	**3**
Article number	**42.584.91**
EAN code	4 006825 601985



4 functions: hammer drilling / drilling / chiseling / chisel lock



Speed control electronics with r/l run



Metal depth stop



Cable clip

ROTARY HAMMER

TC-RH 800 E




Mains connection	**230 – 240 V ~ 50 Hz**
Power rating	**800 W**
Speed	**0 – 1000 min^{-1}**
Blow rate/-strength	**0 – 5180 min^{-1} / 2.5 J**
Drilling capacity (concrete)	**26 mm**
Drill chuck	**SDS-plus tool holder**
Standard accessories	**Metal depth stop, additional handle, transport and storage case**
Net weight | gross weight	**3.3 kg | 5.2 kg**
Packing dimensions	**400 x 360 x 104 mm**
Packaging unit	**3**
Article number	**42.579.20**
EAN code	4 006825 581522



4 functions: hammer drilling / drilling / chiseling / chisel lock



Speed control electronics with r/l run



Safety slip coupling



Hand guard

ROTARY HAMMER


TC-RH 900



Mains connection	220 – 240 V ~ 50 Hz
Power rating	900 W
Speed	850 min^{-1}
Blow rate/strength	4100 min^{-1} / 3.0 J
Drilling capacity concrete	26 mm
Drill chuck	SDS-plus tool holder
Standard accessories	Metal depth stop, additional handle, dust cap, transport and storage case
Net weight | gross weight	4.3 kg | 6.0 kg
Packing dimensions	402 x 305 x 127 mm
Packaging unit	2
Article number	42.582.37
EAN code	4 006825 593242



Sturdy, durable design



Safety slip coupling



Additional handle with anti-twist protection



3 functions: screw fixings, drilling, hammer drilling

ROTARY HAMMER

TH-RH 1600



DE: rating "Very Good"


Mains connection	230 – 240 V ~ 50 Hz
Power rating	1600 W
Speed	800 min^{-1}
Blow rate/strength	3900 min^{-1} / 4.0 J
Drilling capacity concrete	32 mm
Drill chuck	SDS-plus tool holder
Standard accessories	Metal depth stop, additional handle, dust cap, transport and storage case
Net weight | gross weight	7.6 kg | 7.8 kg
Packing dimensions	440 x 365 x 130 mm
Packaging unit	2
Article number	42.584.78
EAN code	4 006825 593280




Sturdy, durable design



Vibration-absorbing handle



Safety slip coupling



4 functions: hammer drilling / drilling / chiseling / chisel lock

ROTARY HAMMER

RT-RH 32



DE: rating "Good"

Mains connection	230 V ~ 50 Hz
Power rating	1250 W
Speed	800 min^{-1}
Blow rate/strength	4300 min^{-1} / 3.5 J
Drilling capacity concrete	32 mm
Drill chuck	SDS-plus tool holder
Standard accessories	Metal depth stop, additional handle, 3 SDS-plus drills, 2 SDS-plus chisels, dust cap, transport and storage case
Net weight | gross weight	6.1 kg | 9.5 kg
Packing dimensions	445 x 140 x 340 mm
Packaging unit	2
Article number	42.584.40
EAN code	4 006825 537581



Vibration-absorbing handle



Metal gear head and metal depth stop



Additional drills and chisels



Rotate stop (with chisel fixing)

Einhell Germany AG

ROTARY HAMMER

RT-RH 32 KIT

Item identical to RT-RH 32, but including 13-pcs. drill bits and chisels set



Art. No.	42.584.85
PU	2
EAN code	4 006825 578935



PRESS CONTROL –
JUST THE RIGHT AMOUNT OF PRESSURE EVERY TIME

Fast drilling – less effort.

The TE-RH 32 E hammer drill has a very powerful pneumatic hammer action. The rapid drilling force is generated by the machine so the user only needs to apply slight pressure. The press control visual display indicates exactly how much pressure to apply for swift progress.

Fewer vibrations – less strain.

Excessive pressure does not speed up the drilling rate but only causes unnecessary vibrations. The press control function makes light work of drilling, making it more pleasant and less tiring for the user.

Less pressure – longer service life

The ability to control the pressure also reduces machine and tool wear. This lengthens the service life of the machine to a significant extent.

SDS-PLUS DRILL BIT AND CHISEL KIT
12 pieces



Art. No. 42.580.90
PU 6
EAN code 4 006825 538885

ROTARY HAMMER

TE-RH 32 E



Kurztest 4/2015 selber machen
DE: rating "Very Good"

Mains connection	230 V ~ 50 Hz
Power rating	1250 W
Speed	0 – 850 min^{-1}
Blow rate/strength	0 – 4100 min^{-1} / 5.0 J
Drilling capacity concrete	32 mm
Drill chuck	SDS-plus tool holder
Standard accessories	Metal depth stop, additional handle, dust cap, transport and storage case
Net weight | gross weight	5.7 kg | 7.9 kg
Packing dimensions	445 x 370 x 130 mm
Packaging unit	2
Article number	42.579.40
EAN code	4 006825 591309




Vibration absorption with press control



Electronic control system for gentle drilling


2 status LEDs: ready for operation and service (brush wear)



4 functions: hammer drilling / drilling / chiseling / chisel lock

ROTARY HAMMER

TE-RH 38 E



Mains connection	220 – 240 V ~ 50 Hz
Power rating	1050 W
Speed	0 – 500 min^{-1}
Blow rate/strength	0 - 4100 min^{-1} / 9.0 J
Drilling capacity concrete	38 mm
Drill chuck	SDS-max tool holder
Standard accessories	Metal depth stop, additional handle, dust cap, transport and storage case
Net weight | gross weight	6.9 kg | 9.5 kg
Packing dimensions	452 x 133 x 345 mm
Packaging unit	2
Article number	42.579.50
EAN code	4 006825 595451

DEMOLITION HAMMER

TE-DH 1027





DE: price/performance "Good"

Mains connection	230 – 240 V ~ 50 Hz
Power rating	1500 W
Blow rate	1900 min^{-1}
Blow strength	32.0 J
Drill chuck	SDS-max tool holder
Long power cable	4 m
Standard accessories	1 pointed chisel, transport and storage case
Net weight | gross weight	10.2 kg | 15.4 kg
Packing dimensions	635 x 177 x 400 mm
Packaging unit	1
Article number	41.390.90
EAN code	4 006825 598377



Vibration absorption with press control



2 status LEDs: ready for operation and service (brush wear)



Aluminum alloy gearbox



Simple chisel adjustment function on drill chuck



Speed electronics for finely dosed power generation



Powerful – for drilling holes of up to Ø 38 mm in concrete



Vibration-absorbing handle



Additional handle with 360° adjustment function

PAINT AND MORTAR MIXER

TC-MX 1100 E



Mains connection	230 V ~ 50 Hz
Power rating	1050 W
Gears	1-speed gearbox
Speed	0 – 550 min^{-1}
Mixing tool mount	13 mm drill chuck
Standard accessories	Additional handle, spiral stirrer for paint, etc. Ø 58 mm, l = 530 mm
Net weight | gross weight	3.3 kg | 3.7 kg
Packing dimensions	315 x 255 x 100 mm
Packaging unit	5
Article number	42.585.17
EAN code	4 006825 604160

PAINT AND MORTAR MIXER

TC-MX 1400-2 E

NEW!



Mains connection	220 – 240 V ~ 50 Hz
Power rating	1400 W
Gears	2-speed gearbox
Speed	0 - 480 min^{-1} / 0 - 780 min^{-1}
Mixing tool mount	M14
Standard accessories	1 spiral mixing tool for mortar Ø 133 mm, 2 open-end spanners
Net weight | gross weight	3.7 kg | 6.1 kg
Packing dimensions	325 x 325 x 210 mm
Packaging unit	2
Article number	42.585.50
EAN code	4 006825 602241



Universal application – for stirring and drilling



Electronic speed control for adjustment to the material



Large ergonomic soft grip surfaces



Electronic speed control with constant electronic control



Powerful motor for high mixing output



Thanks to additional handles and soft grip it's comfortable to use



Practical handle design to stand the tool upright when not in use



Shaft mount on the gear neck for stationary operation

PAINT AND MORTAR MIXER

TE-MX 1600-2 CE

NEW!



Mains connection	220 – 240 V ~ 50 Hz
Power rating	1600 W
Gears	2-speed gearbox
Speed	0 – 460 min^{-1} / 0 – 750 min^{-1}
Mixing tool mount	M14
Standard accessories	1 spiral-mixing tool for mortar Ø 133 mm, 2 open-ended spanners
Net weight | gross weight	3.7 kg | 6.0 kg
Packing dimensions	325 x 325 x 210 mm
Packaging unit	2
Article number	42.585.55
EAN code	4 006825 602258



2-speed gearing to select optimum speed for the consistency of the mixture.



Electronic speed control with constant electronic control



Practical handle design to stand the tool upright when not in use

CONSTANT ELECTRONIC

Constant electronic control for zero speed loss even under load

Einhell Germany AG



Without constant electronic control



With constant electronic control

CONSTANT ELECTRONIC CONTROL –
CRUISE CONTROL FOR POWER TOOLS

Always on full power – for simpler and better mixing.

Dynamic speed control – for zero speed loss even under load. This guarantees a very even mixture regardless of the consistency of the substances being mixed. Whether paint or adhesive, bitumen or mortar – perfect results every time.

MIXER KIT M14
2 pieces
for bitumen, epoxide, adhesive and mortar, plaster



Art. No.	42.583.65
PU	4
EAN code	4 006825 572223

Grinding, cutting, saving – all with one tool.



Christoph Gaßner
(Marketing Management,
Einhell Germany AG)

My little Einhell angle grinder is lightweight and compact. And practical! The spindle lock and tool-free wheel adjustment function make my work a pleasure. Last spring I made my own smoker and I hardly put the angle grinder down for a minute. No problem!
And the meat tastes twice as good from a home-made grill!

Note: For safe handling of the products please refer to the instructions in the operating manual.

CORDLESS ANGLE GRINDER

TE-AG 18 Li

NEW!



Einhell Germany AG

POWER X CHANGE FAMILY



BOOSTED BY
TWIN PACK©
2 x 18 V = 36 V SUPERPOWER

selber machen PRAXISTEST SEHR GUT

DE: rating "Very good"

POWER X CHANGE

CE

Battery pack	18 V / 3000 mAh / Li-Ion
Speed	8500 min^{-1}
Disc diameter	115 mm
Standard accessories	Key (storage compartment in additional handle), system battery, charger, transport and storage case
	Cutting disc not included
Net weight | gross weight	2.3 kg | 3.2 kg
Packing dimensions	315 x 145 x 145 mm
Packaging unit	n/a
Article number	44.311.13
EAN code	4 006825 610345



Extensive safety package: restart safeguard, softstart function and overload cut-out



Slimline design for comfortable and ergonomic operation



Greatly reduced vibrations thanks to separation of motor and gearing.



Lightest angle grinder in its class

CORDLESS ANGLE GRINDER

TE-AG 18 Li - Solo

Item identical to TE-AG 18 Li, but without system battery and fast charger



Art. No.	44.311.10
PU	6
EAN code	4 006825 602593

You will find an extensive range of cutting/grinding/roughing wheels and other accessories at:

kwb

www.kwb.eu

ANGLE GRINDER

TC-AG 115



Mains connection	230 V ~ 50 Hz
Power rating	500 W
Speed	12000 min^{-1}
Disc diameter	115 mm
Standard accessories	Key
	Cutting disc not included
Net weight | gross weight	1.7 kg | 1.8 kg
Packing dimensions	297 x 95 x 120 mm
Packaging unit	6
Article number	44.306.18
EAN code	4 006825 603279

ANGLE GRINDER

RT-AG 115



DE: rating "Very Good"

selbst ist der Mann
SELBST AUSPROBIERT
FAZIT: 11111
www.selbst.de

DE: rating "price tip"

Preistipp
Test 10/2012
selber machen

Mains connection	230 V ~ 50 Hz
Power rating	600 W
Speed	12000 min^{-1}
Disc diameter	115 mm
Standard accessories	Key (storage compartment in additional handle)
	Cutting disc not included
Net weight | gross weight	1.8 kg | 2.3 kg
Packing dimensions	325 x 128 x 115 mm
Packaging unit	6
Article number	44.305.50
EAN code	4 006825 537277



Low-profile gear head enables the user to reach areas which are difficult to access



Spindle lock for easy disc change



Disc guard quick adjust



Cable clip



The additional handle can be set to two positions for different working positions



Lightweight and compact design



Soft grip



Key in additional handle

ANGLE GRINDER

TE-AG 115/600



Mains connection	230 V ~ 50 Hz
Power rating	600 W
Speed	11000 min^{-1}
Disc diameter	115 mm
Standard accessories	Key (storage compartment in additional handle)
	Cutting disc not included
Net weight | gross weight	1.9 kg | 2.5 kg
Packing dimensions	325 x 130 x 125 mm
Packaging unit	6
Article number	44.308.55
EAN code	4 006825 593402



Disc guard quick adjust



Cable clip



Lightweight and compact design



Key in additional handle

ANGLE GRINDER

TE-AG 115



Mains connection	230 V ~ 50 Hz
Power rating	720 W
Speed	11000 min^{-1}
Disc diameter	115 mm
Standard accessories	Key (storage compartment in additional handle)
	Cutting disc not included
Net weight | gross weight	1.9 kg | 2.4 kg
Packing dimensions	325 x 125 x 130 mm
Packaging unit	6
Article number	44.308.50
EAN code	4 006825 577211



Disc guard quick adjust



Cable clip



The additional handle can be set to three positions for different working positions.



Key in additional handle

ANGLE GRINDER

TC-AG 125



CE

Mains connection	230 V ~ 50 Hz
Power rating	850 W
Speed	11000 min^{-1}
Disc diameter	125 mm
Standard accessories	Key
	Cutting disc is not included
Net weight | gross weight	2.1 kg | 2.3 kg
Packing dimensions	295 x 115 x 100 mm
Packaging unit	6
Article number	44.306.19
EAN code	4 006825 603286



Low-profile gear head enables the user to reach areas which are difficult to access



Spindle lock for easy disc change



The additional handle can be set to two positions for different working positions.



Lightweight and compact design

ANGLE GRINDER
TC-AG 125 KIT
Item identical to TC-AG 125, but **including 2 diamond cutting discs and additional cutting disc guard**



Art. No.	44.306.24
PU	6
EAN code	4 006825 608373

ANGLE GRINDER
TE-AG 125/750 KIT
Item identical to TE-AG 125/750, but **including 1 diamond cutting disc and additional cutting disc guard**



Art. No.	44.308.85
PU	4
EAN code	4 006825 589832

CUTTING STAND
TS 115/125
for angle grinders with wheel diameters of 115 and 125 mm



Art. No.	44.310.40
PU	4
EAN code	4 006825 506457

You will find an extensive range of cutting/grinding/roughing wheels and other accessories at:

kwb

www.kwb.eu

ANGLE GRINDER

TE-AG 125/750



Mains connection	230 V ~ 50 Hz
Power rating	750 W
Speed	11000 min^{-1}
Disc diameter	125 mm
Standard accessories	Key (storage compartment in additional handle)
	Cutting disc not included
Net weight | gross weight	2.2 kg | 2.6 kg
Packing dimensions	335 x 145 x 120 mm
Packaging unit	6
Article number	44.308.80
EAN code	4 006825 583267



Disc guard quick adjust



Flat metal gear head



Soft grip



Key in additional handle

ANGLE GRINDER

RT-AG 125/1



Mains connection	230 V ~ 50 Hz
Power rating	1010 W
Speed	12000 min^{-1}
Disc diameter	125 mm
Standard accessories	Key (storage compartment in additional handle)
	Cutting disc not included
Net weight | gross weight	2.2 kg | 2.7 kg
Packing dimensions	420 x 103 x 115 mm
Packaging unit	6
Article number	44.305.60
EAN code	4 006825 537284



Disc guard quick adjust



Spindle lock



Soft grip



Key in additional handle



Without constant electronic control



With constant electronic control

CONSTANT ELECTRONIC CONTROL – CRUISE CONTROL FOR POWER TOOLS

Always on full power.

Dynamic speed control – for zero speed loss even under load.

Better – safer – faster.

The constant electronic control guarantees consistent speed and smooth cutting and grinding action. The result is better, the process is safer, and progress is faster.

CUTTING STAND
TS 115/125
for angle grinders with wheel diameters of 115 and 125 mm



Art. No.	44.310.40
PU	4
EAN code	4 006825 506457

CUTTING STAND
TS 230
for angle grinders with wheel diameters of 230 mm



Art. No.	44.310.50
PU	6
EAN code	4 006825 509366

DIAMOND WHEEL SET
for angle grinders Ø 230 mm 230 mm, 2 pieces



Art. No.	44.403.33
PU	1
EAN code	4 006825 442540

TE-AG 125 CE



CE

Mains connection	230 V ~ 50 Hz
Power rating	1100 W
Speed	3000 - 11000 min-1
Disc diameter	125 mm
Standard accessories	Key (storage compartment in additional handle)
	Cutting disc not included
Net weight | gross weight	2.5 kg | 3.0 kg
Packing dimensions	440 x 140 x 125 mm
Packaging unit	6
Article number	44.308.60
EAN code	4 006825 577228



Constant electronics



Disc guard quick adjust



Slim design



Softgrip und cable clip

ANGLE GRINDER

TE-AG 230/2000



Mains connection	230 V ~ 50 Hz
Power rating	2000 W
Speed	6500 min^{-1}
Disc diameter	230 mm
Standard accessories	Key
	Cutting disc not included
Net weight | gross weight	5.4 kg | 6.3 kg
Packing dimensions	540 x 140 x 160 mm
Packaging unit	2
Article number	44.308.40
EAN code	4 006825 593419

ANGLE GRINDER

TE-AG 230



Mains connection	230 V ~ 50 Hz
Power rating	2350 W
Speed	6500 min^{-1}
Disc diameter	230 mm
Standard accessories	Key
	Cutting disc not included
Net weight | gross weight	5.4 kg | 6.8 kg
Packing dimensions	565 x 125 x 183 mm
Packaging unit	2
Article number	44.308.70
EAN code	4 006825 577235



Toolless disc guard adjustment



Soft start



Disc guard quick adjust



Soft start



Soft grip



Cable clip



Adjustable main grip



Anti-vibration main grip and soft grip

Shave money off your home maintenance bills with a good plane.



Alexander Mock
(Purchasing, Einhell Germany AG)

I decided that my own hand-held plane had served its time and bought myself an Einhell electric plane. I have been using it to do jobs in and around the house for over six months. The plane is so easy to use and is so versatile that it is an indispensable tool in my workshop. The new summer house went up in next to no time, for example, although I did of course have some help from my other Einhell tools.

Note: For safe handling of the products please refer to the instructions in the operating manual.

MASONRY CHANNEL CUTTER

TH-MA 1300



Mains connection	230 V ~ 50 Hz
Power rating	1320 W
Speed	9000 min^{-1}
Cuting disc	Ø 125 x Ø 22.2 mm
Slot depth / Slot width	8 – 30 mm / 8 – 26 mm
Standard accessories	Key for changing disc, transport and storage case
Net weight | gross weight	4.9 kg | 6.3 kg
Packing dimensions	390 x 230 x 270 mm
Packaging unit	3
Article number	43.507.30
EAN code	4 006825 593044

BISCUIT JOINTER

TC-BJ 900




Mains connection	230 V ~ 50 Hz
Power rating	860 W
Speed	11000 min^{-1}
Cutting depth max.	14 mm
Angle adjustment	Infinitely to 90°
Height adjustment	5 – 35 mm
Standard accessories	Dust bag, face spanner, transport and storage case
Net weight | gross weight	3.3 kg | 4.6 kg
Packing dimensions	430 x 170 x 230 mm
Packaging unit	2
Article number	43.506.20
EAN code	4 006825 604313




Suitable for plaster, brickwork, aerated concrete and plasterboard



Dust emissions greatly reduced




Infinitely variable angle adjustment from 0° to 90°



Cutting depth up to 14 mm – suitable for biscuit dowel types 0 / 10 / 20



Overload protected



Soft start

CUTTER BLADE

for TC-BJ 900



Art. No.	43.506.90
PU	50
EAN code	4 006825 431568

ROUTER

TC-RO 1155 E



Mains connection	230 – 240 V ~ 50 Hz
Power rating	1100 W
Speed	11000 – 30000 min^{-1}
Stroke height	55 mm
Clamp	6 and 8 mm
Standard accessories	Parallel guide, compass, copy sleeve, key, clamp (6/8 mm), dust extraction adapter, chip shield
Net weight | gross weight	3.0 kg | 4.1 kg
Packing dimensions	287 x 144 x 230 mm
Packaging unit	4
Article number	43.504.70
EAN code	4 006825 580143

ROUTER

TE-RO 1255 E



DE: Test winner *DE: rating "Good"*

Identical in construction to the tested RT-RO 55

Mains connection	230 V ~ 50 Hz
Power rating	1200 W
Speed	11000 – 30000 min^{-1}
Stroke height	55 mm
Clamp	6 and 8 mm
Standard accessories	Parallel guide, compass, copy sleeve, key, clamp (6/8 mm), dust extraction adapter, chip shield
Net weight | gross weight	3.2 kg | 4.4 kg
Packing dimensions	280 x 278 x 172 mm
Packaging unit	4
Article number	43.504.90
EAN code	4 006825 537215



Chip shield



Precision depth adjustment



Chip shield



Precision depth adjustment with revolver stop



Depth adjustment with revolver stop



Speed control electronic



Soft grip



Cable clip

ELECTRIC PLANER

TE-PL 850



Mains connection	230 V ~ 50 Hz
Power rating	850 W
Speed	15000 min^{-1}
Chip depth / planing width	0 – 3 mm / 82 mm
Rebate depth	0 – 18 mm
Standard accessories	Parallel guide, rebate depth stop, dust extraction adapter
Net weight | gross weight	3.6 kg | 4.0 kg
Packing dimensions	370 x 185 x 200 mm
Packaging unit	4
Article number	43.452.70
EAN code	4 006825 537567



Chip ejection to the left or right



Automatic park rest



Blade and tool depot



Rebate depth stop

Einhell Germany AG

GANG CUTTER FS 12

for TC-RO 1155 E and TE-RO 1255 E
12-piece, in wooden case



Art. No.	43.501.99
PU	20
EAN code	4 006825 431391

BLADE SET

for TE-PL 850
2-piece, reversible blade



Art. No.	43.102.35
PU	1
EAN code	4 006825 574968

SAWING

Einhell saws simply make a darn good job of cutting.



Andreas Sporrer
(Product Trainer, Einhell Germany AG)

The Einhell universal saw is now my favorite tool. I'm more and more impressed with its versatility across a whole range of applications. In the garden for thinning out trees and shrubs, for the carpentry work I needed to do when I built a treehouse for my son - new uses for it seem to turn up pretty much every day.
I'm hoping there'll be a toy version soon for my son so that he can add such a great piece of kit to his collection.

Note: For safe handling of the products please refer to the instructions in the operating manual.

CORDLESS PENDULUM JIGSAW

TE-JS 18 Li

SOLO



TECHNIK ZU HAUSE.de
Preis/Leistung
sehr gut

DE: rating "Very good"

POWER X CHANGE

Battery pack	**Compatible with Power X-Change**
Bevel cuts, max.	**47°**
Blade speed	**0 – 2400 min^{-1}**
Cutting depth (wood/plastic/steel)	**80 / 12 / 10 mm**
Pendulum action	**4 levels (3 + 0)**
Stroke height	**25 mm**
Standard accessories	**Parallel guide, attachable cutting line guide, dust extraction adapter, chip guard**
Net weight | gross weight	**1.8 kg | 2.3 kg**
Packing dimensions	**238 x 90 x 227 mm**
Packaging unit	**5**
Article number	**43.212.00**
EAN code	4 006825 601398



Special stroke makes exact or particularly fast cuts possible



Universal saw blade holder / tool-free saw blade change



Perfect view of the workpiece: Dust blow-off function and LED lamp



Plastic insert greatly reduces splintering on the workpiece surface

Einhell Germany AG

POWER X CHANGE FAMILY



BOOSTED BY
TWIN PACK©
2 x 18 V = 36 V SUPERPOWER

You will find an extensive range of saw blades and other accessories at:

kwb

www.kwb.eu

JIGSAW

TC-JS 60



Mains connection	230 V ~ 50 Hz
Power rating	410 W
Bevel cuts, max.	45°
Blade speed	500 – 3000 min^{-1}
Cutting depth (wood/plastic/steel)	60 / 10 / 6 mm
Pendulum action	–
Stroke height	18 mm
Standard accessories	1 saw blade, dust extraction adapter
Net weight | gross weight	1.6 kg | 1.9 kg
Packing dimensions	240 x 75 x 210 mm
Packaging unit	10
Article number	43.211.17
EAN code	4 006825 599657



Electronic speed control for sawing a range of materials



Versatile cutting up to 45°



Clear view of cutting area



XL grip areas

PENDULUM JIGSAW

TC-JS 80




DE: price/performance "Good – Very good"

Mains connection	230 V ~ 50 Hz
Power rating	600 W
Bevel cuts, max.	45°
Blade speed	800 – 3000 min^{-1}
Cutting depth (wood/plastic/steel)	80 / 20 / 10 mm
Pendulum action	4 levels (3 + 0)
Stroke height	18 mm
Standard accessories	1 saw blade, parallel guide, dust extraction adapter
Net weight | gross weight	2.1 kg | 2.4 kg
Packing dimensions	260 x 76 x 230 mm
Packaging unit	10
Article number	43.211.16
EAN code	4 006825 599640



Pendulum action ensures rapid sawing progress



Versatile cutting up to 45°



Electronic speed control for sawing a range of materials



XL grip areas

PENDULUM JIGSAW

TH-JS 85



Mains connection	230 V ~ 50 Hz
Power rating	620 W
Bevel cuts, max.	45°
Blade speed	800 – 3000 min^{-1}
Cutting depth (wood/plastic/steel)	85 / 12 / 8 mm
Pendulum action	4 levels (3 + 0)
Stroke height	20 mm
Standard accessories	Parallel guide, dust extraction adapter, 1 saw blade, chip guard, removable workpiece guard, transport and storage case
Net weight | gross weight	2.0 kg | 3.2 kg
Packing dimensions	340 x 286 x 98 mm
Packaging unit	6
Article number	43.211.40
EAN code	4 006825 576573

PENDULUM JIGSAW

RT-JS 85



DE: Test winner

selbst ist der Mann
PRAXISTEST
TESTSIEGER
www.selbst.de

DE: rating "Good"

TESTMAGAZIN-URTEIL
GUT 86,7 %

Mains connection	230 V ~ 50 Hz
Power rating	750 W
Bevel cuts, max.	45°
Blade speed	800 – 3000 min^{-1}
Cutting depth (wood/plastic/steel)	85 / 12 / 8 mm
Pendulum action	4 levels (3 + 0)
Stroke height	23 mm
Standard accessories	Parallel guide, dust extractor adapter, 3 saw blades
Net weight | gross weight	2.5 kg | 3.0 kg
Packing dimensions	310 x 230 x 95 mm
Packaging unit	5
Article number	43.210.80
EAN code	4 006825 537208



Blade change without tools




Adjustment without tools for bevel cuts up to 45°



Saw blade depot



Blade change without tools



Chip blower function can be switched off



Removable workpiece guard



Adjustment without tools for bevel cuts up to 45°



LED lamp

PENDULUM JIGSAW

TE-JS 100



DE: rating "very good"

DE: Test winner

Mains connection	230 V ~ 50 Hz
Power rating	750 W
Bevel cuts, max.	45°
Blade speed	800 – 3000 min^{-1}
Cutting depth (wood/plastic/steel)	100 / 12 / 10 mm
Pendulum action	4 levels (3 + 0)
Stroke height	23 mm
Standard accessories	Parallel guide, dust extraction adapter, 1 saw blade, chip guard, cutting line guide, transport and storage case
Net weight | gross weight	2.3 kg | 4.3 kg
Packing dimensions	415 x 310 x 100 mm
Packaging unit	5
Article number	43.211.60
EAN code	4 006825 581515


CORDLESS ALL-PURPOSE SAW

TE-AP 18 Li

SOLO



Battery pack	Compatible with Power X-Change
Blade speed	0 – 2600 min^{-1}
Cutting depth (wood/steel)	100 / 6 mm
Pendulum action	–
Stroke height	22 mm
Saw blade thickness	0.6 – 1.6 mm
Standard accessories	1 saw blade (wood)
Net weight | gross weight	1.7 kg | 2.0 kg
Packing dimensions	410 x 80 x 160 mm
Packaging unit	6
Article number	43.263.00
EAN code	4 006825 601381



Removable cutting line guide



Universal blade holderwithout tools



For universal use in gardens, workshops and on building sites



The unrivaled Triathlon motor – power, speed and endurance



Adjustment without tools for bevel cuts up to 45°



LED lamp



No tools required to change saw blade and adjust soleplate

ALL-PURPOSE SAW

TC-AP 650 E




Mains connection	230 – 240 V ~ 50 Hz
Power rating	650 W
Blade speed	500 – 3000 min^{-1}
Cutting depth (wood/steel)	150 / 10 mm
Pendulum action	-
Stroke height	20 mm
Saw blade thickness	0.5 – 1.4 mm
Standard accessories	1 saw blade (wood)
Net weight | gross weight	2.8 kg | 3.2 kg
Packing dimensions	490 x 180 x 80 mm
Packaging unit	5
Article number	43.261.41
EAN code	4 006825 585292

ALL-PURPOSE SAW

TE-AP 1050 E





Mains connection	230 V ~ 50 Hz
Power rating	1050 W
Blade speed	0 – 2700 min^{-1}
Cutting depth (wood/steel)	200 / 20 mm
Pendulum action	2 levels (1 + 0)
Stroke height	29 mm
Saw blade thickness	0.8 – 1.5 mm
Standard accessories	1 saw blade (wood)
Net weight | gross weight	3.8 kg | 4.6 kg
Packing dimensions	545 x 235 x 98 mm
Packaging unit	4
Article number	43.261.35
EAN code	4 006825 575354



Electronic stroke speed control



Ergonomic, slim design with soft grip



With pendulum action for rapid progress



Flexible due to turnable head



Blade change without tools



Toolless soleplate adjustment
for optimum blade use



Blade change without tools



Toolless soleplate adjustment
for optimum blade use

POWER X CHANGE® FAMILY



BOOSTED BY
TWIN PACK©
2 x 18 V = 36 V SUPERPOWER

CORDLESS HAND-HELD CIRCULAR SAW

TE-CS 18 Li

SOLO

NEW!



POWER X CHANGE

CE

Battery pack	Compatible with Power X-Change
Idling speed	4200 min^{-1}
Saw blade	150 x 10 mm
Number of teeth	24
Cutting depth 90°	48 mm
Cutting depth 45°	32 mm
Standard accessories	Parallel guide, key for changing the saw blade
Net weight | gross weight	n/a
Packing dimensions	570 x 345 x 225 mm
Packaging unit	2
Article number	43.312.00
EAN code	4 006825 612394



Simple, tool-free adjustment of cut depth and angle



High-grade LED light



Compact, handy and ergonomic design



Compatible with Einhell guide rail system


MINI HAND-HELD CIRCULAR SAW

TC-CS 860/1 KIT

WITH GUIDE RAIL



Mains connection	230 – 240 V ~ 50 Hz
Power rating	450 W
Idling speed	6000 min^{-1}
Cutting depth	23 mm
Saw blades	Ø 85 x Ø 10 mm
Standard accessories	Three-part guide rail (1.2 m), 2 saw blades (wood/plastic), 1 diamond cutting wheel (tiles), key for changing the saw blade, dust extraction adapter, parallel guide, transport and storage case
Net weight | gross weight	2.0 kg | 3.6 kg
Packing dimensions	370 x 133 x 265 mm
Packaging unit	4
Article number	43.309.93
EAN code	4 006825 610444




For high-precision plunge cuts



Three-part guide rail guarantees perfect cuts



Cutting depth limit



Infinitely adjustable cutting depth

Einhell Germany AG

MINI HAND-HELD CIRCULAR SAW

TC-CS 860 KIT

Item identical to TC-CS 860/1 Kit, but without guide rail




Art. No.	43.309.92
PU	4
EAN code	4 006825 602340

SAW BLADE SET

for TC-CS 860 Kit

85 x 10 mm, 6 pieces (2 x wood, 2 x timber products, 2 x tiles)



Art. No.	45.021.28
PU	60
EAN code	4 006825 575347




HAND-HELD CIRCULAR SAW

TH-CS 1200/1



CE

Mains connection	230 V ~ 50 Hz
Power rating	1230 W
Idling speed	5000 min^{-1}
Cutting depth 90° / 45°	55 mm / 37 mm
Saw blade	Ø 160 x Ø 16 mm, t 24
Standard accessories	Parallel guide, key for changing the saw blade
Net weight | gross weight	3.7 kg | 4.5 kg
Packing dimensions	350 x 255 x 370 mm
Packaging unit	4
Article number	43.309.36
EAN code	4 006825 593297



Toolless cutting depth adjustment



Angular cuts of up to 45°



Ergonomic, large handle



Splitting wedge provides high level of user safety

Note: For safe handling of the products please refer to the instructions in the operating manual.

HAND-HELD CIRCULAR SAW

TE-CS 165



DE: rating "Good"

Mains connection	230 V ~ 50 Hz
Power rating	1200 W
Idling speed	5500 min^{-1}
Cutting depth 90° / 45°	55 mm / 40 mm
Saw blade	Ø 165 x Ø 16 mm, t 24
Standard accessories	Parallel guide, key for changing the saw blade
Net weight | gross weight	3.8 kg | 4.8 kg
Packing dimensions	335 x 248 x 248 mm
Packaging unit	4
Article number	43.310.10
EAN code	4 006825 599565



High-performance motor and special saw blade for rapid and precise cutting



Simple, tool-free adjustment of cut depth and angle



Additional ergonomic handle with soft grip



Compatible with Einhell guide rail system

Einhell Germany AG

EINHELL GUIDE BAR SYSTEM

for TE-CS 165 and TE-CS 190, 700 mm, 2 pieces



Art. No.	45.021.15
PU	4
EAN code	4 006825 575378

HAND-HELD CIRCULAR SAW

TC-CS 1400




Mains connection	230 V ~ 50 Hz
Power rating	1400 W
Idling speed	5200 min^{-1}
Cutting depth 90° / 45°	66 mm / 45 mm
Saw blade	Ø 190 x Ø 30 mm, t 24
Standard accessories	Parallel guide, key for changing the saw blade
Net weight | gross weight	4.3 kg | 5.2 kg
Packing dimensions	355 x 255 x 270 mm
Packaging unit	4
Article number	43.309.37
EAN code	4 006825 593310

HAND-HELD CIRCULAR SAW

TE-CS 190



Mains connection	230 V ~ 50 Hz
Power rating	1500 W
Idling speed	5500 min^{-1}
Cutting depth 90° / 45°	66 mm / 48 mm
Saw blade	Ø 190 x Ø 30 mm, t 24
Standard accessories	Parallel guide, key for changing the saw blade, dust extraction adapter
Net weight | gross weight	5.2 kg | 6.5 kg
Packing dimensions	237 x 270 x 268 mm
Packaging unit	2
Article number	43.309.70
EAN code	4 006825 577037



Soft start



Toolless cutting depth adjustment




LED illumination of the sawing point



Additional marking of the sawing line



Ergonomic, large handle



Splitting wedge provides high level of user safety



Splitting wedge provides high level of user safety



Compatible with Einhell guide bar system

A polished performance every time.



David Bachmeier
(Student on block release course, Einhell Germany AG)

A few weeks ago my future parents-in-law wanted to spruce up their garden furniture. I offered to do it for them with my trusty Einhell rotating sander. Exact speed setting, high surface removal rate, low dust generation – the tool is simply ideal for jobs like these!
The „restoration" took next to no time – but it left a lasting impression on my girlfriend's parents!

Note: For safe handling of the products please refer to the instructions in the operating manual.



MULTIMAXX CORDLESS

TE-MG 12 Li






Battery pack	12 V / 1300 mAh / Li-Ion
Oscillating speed	10000 – 34000 min^{-1}
Abrasive paper size	93 x 93 x 93 mm
Oscillating angle	3°
Charging time	1 h
Standard accessories	Battery pack, 1h fast charger, saw blade, scraper, sanding disc, TCT cutting disc for tile gaps, 6 papers, transport and storage case
Net weight | gross weight	0.8 kg | 2.5 kg
Packing dimensions	320 x 85 x 250 mm
Packaging unit	5
Article number	44.650.31
EAN code	4 006825 579284



Various tools for different jobs



Velcro fastening for a quick change



1h high-speed charger with Einhell Battery Management System



Speed control electronic

Note: For safe handling of the products please refer to the instructions in the operating manual.

MULTIMAXX CORDLESS

RT-MG 10,8 Li

WITH 2ND BATTERY PACK





Battery pack	10.8 V / 1300 mAh / Li-Ion
Oscillating speed	10000 – 34000 min^{-1}
Abrasive paper size	93 x 93 x 93 mm
Oscillating angle	3°
Charging time	3 h
Standard accessories	2nd battery pack, charger, saw blade, scraper, sanding disc, TCT cutting disc for tile gaps, 6 papers, transport and storage case
Net weight | gross weight	0.8 kg | 2.6 kg
Packing dimensions	320 x 85 x 250 mm
Packaging unit	5
Article number	44.650.30
EAN code	4 006825 576382



Comprehensive range of accessories



Velcro fastening for a quick change



Slim design



Speed control electronic

Einhell Germany AG

STARTER KIT

for TE-MG 12 Li, RT-MG 10,8 Li, TC-MG 220 E, TE-MG 200 CE
6 pieces
for wood and plastic, in parts for alu



Art. No.	44.650.10
PU	1
EAN code	4 006825 553178

You will find an extensive range of abrasive papers, multitool and other accessories at:

kwb

www.kwb.eu

MULTIMAXX

TC-MG 220 E

NEW!





Mains connection	220 - 240 V ~ 50 Hz
Power rating	220 Watt
Oscillating speed	11000 – 19000 min^{-1}
Abrasive paper size	93 x 93 x 93 mm
Oscillating angle	3.2°
Standard accessories	Plunge-cut saw blade for wood, scraper, triangular grinding/sanding plate, 1 sanding blade, dust extraction adapter
Net weight | gross weight	1.2 kg | 1.7 kg
Packing dimensions	330 x 82 x 110 mm
Packaging unit	8
Article number	44.650.90
EAN code	4 006825 606607

MULTIMAXX

TE-MG 200 CE









Identical in construction to the tested RT-MG 200 E


Mains connection	230 V ~ 50 Hz
Power rating	200 W
Oscillating speed	30000 – 42000 min^{-1}
Abrasive paper size	93 x 93 x 93 mm
Oscillating angle	3°
Standard accessories	Saw blade (wood/plastic), scraper, sanding disc, 6 sanding blades, dust extraction adapter, transport- and storage case
Net weight | gross weight	1.1 kg | 2.7 kg
Packing dimensions	350 x 105 x 277 mm
Packaging unit	5
Article number	44.650.40
EAN code	4 006825 577204



Speed control electronics



Softgrip



Comprehensive range of accessories



Soft start function and constant electronic speed control



Slim design



Dust extraction



Slim design



12 positions

GRINDING AND ENGRAVING TOOL

TC-MG 135 E



Mains connection	230 V ~ 50 Hz
Power rating	135 W
Speed	10000 - 32000 min $^{-1}$
Oscillating circuit	Ø 0.5 / 1.6 / 2.4 / 3.2 mm
Standard accessories	Flexible shaft 1 m, telescopic stand rod, 189 pcs. accessory set for drilling, polishing, grinding, cutting and milling, transport and storage case
Net weight | gross weight	0.7 kg | 2.5 kg
Packing dimensions	340 x 218 x 125 mm
Packaging unit	6
Article number	44.191.69
EAN code	4 006825 585315



Speed control electronics



Spindle lock



Soft grip



Telescopic stand rod and flexible shaft

Einhell Germany AG

STARTER KIT

for TE-MG 12 Li, RT-MG 10,8 Li, TC-MG 220 E, TE-MG 200 CE
6 pieces
for wood and plastic, in parts for alu



Art. No.	44.650.10
PU	1
EAN code	4 006825 553178

You will find an extensive range of abrasive papers, multitool and other accessories at:

kwb

www.kwb.eu

DELTA SANDER

TC-DS 19





Mains connection	230 V ~ 50 Hz
Power rating	190 W
Vibrations	20000 min^{-1}
Oscillating circuit	1.2 mm
Sanding area	90 x 90 x 90 mm
Abrasive paper size	93 x 93 x 93 mm
Standard accessories	3 abrasive papers (P60, P80, P120), dust extraction adapter
Net weight | gross weight	1.1 kg | 1.2 kg
Packing dimensions	315 x 100 x 105 mm
Packaging unit	10
Article number	44.642.35
EAN code	4 006825 593167

DELTA SANDER

TE-DS 20 E







DE: rating "Very good"

Mains connection	230 V ~ 50 Hz
Power rating	200 W
Vibrations	13000 – 20000 min^{-1}
Oscillating circuit	2.0 mm
Sanding area	90 x 90 x 90 mm
Abrasive paper size	93 x 93 x 93 mm
Standard accessories	10 abrasive papers (5 x P 80, 5 x P 120), dust extraction adapter
Net weight | gross weight	1.2 kg | 1.5 kg
Packing dimensions	350 x 108 x 95 mm
Packaging unit	10
Article number	44.642.50
EAN code	4 006825 580686



Velcro fastening for a quick change



Ergonomic, slim design



Perfect ergonomics and low vibrations



Soft grip



Long durability



Incl. 3 abrasive papers



With Velcro fastening for standard abrasive paper



Speed control electronic

CORDLESS MULTI SANDER

TE-OS 18 Li

SOLO



POWER X CHANGE

Battery pack	Compatible with Power X-Change
Vibrations	24000 min^{-1}
Oscillating circuit	1.6 mm
Sanding area	104 cm^2
Abrasive paper size	150 x 150 x 100 mm
Standard accessories	6 abrasive paper (3x 120 K, 3x 240 K), dust extractor adapter
Net weight | gross weight	0.8 kg | 1.1 kg
Packing dimensions	240 x 110 x 144 mm
Packaging unit	8
Article number	44.607.10
EAN code	4 006825 602609

MULTI SANDER

TH-OS 1016



Mains connection	230 V ~ 50 Hz
Power rating	100 W
Vibrations	24000 min^{-1}
Oscillating circuit	1.6 mm
Sanding area	104 cm^2
Abrasive paper size	150 x 150 x 100 mm
Standard accessories	1 abrasive paper (P120), dust collection bag
Net weight | gross weight	1.0 kg | 1.1 kg
Packing dimensions	200 x 140 x 120 mm
Packaging unit	10
Article number	44.606.10
EAN code	4 006825 592481



With "Extreme Fix" Velcro fastening for quick and secure fastening of abrasive paper



Soft grip molded to the palm of the hand



Velcro fastening for a quick change



Perfect ergonomics



Efficient dust extractor and filter box for added cleanliness



Robust solid metal impeller for smooth and quiet action



Practical design for multiple applications



Low-dust operation

MULTI SANDER

TE-OS 1320





Mains connection	230 V ~ 50 Hz
Power rating	130 W
Vibrations	24000 min^{-1}
Oscillating circuit	2.0 mm
Sanding area	104 cm^2
Abrasive paper size	150 x 150 x 100 mm
Standard accessories	3 abrasive papers (P120), dust collection box
Net weight | gross weight	1.2 kg | 1.5 kg
Packing dimensions	235 x 112 x 145 mm
Packaging unit	10
Article number	44.605.60
EAN code	4 006825 573169



With Velcro fastening for standard abrasive paper



Perfect ergonomics



Dust collection box with filter



Soft grip and cable clip

MULTI SANDER

RT-OS 13 Kit





Mains connection	230 V ~ 50 Hz
Power rating	130 W
Vibrations	24000 min^{-1}
Oscillating circuit	2.0 mm
Sanding area	104 cm^2
Abrasive paper size	150 x 150 x 100 mm
Standard accessories	50 abrasive papers, dust extractor adapter, dust collection box with filter
Net weight | gross weight	1.2 kg | 1.8 kg
Packing dimensions	235 x 145 x 140 mm
Packaging unit	10
Article number	44.605.65
EAN code	4 006825 598520



Perfect ergonomics



Dust collection box with filter



With Velcro fastening for standard abrasive paper



Soft grip and cable clip

MULTI SANDER

RT-XS 28



Mains connection	230 V ~ 50 Hz
Power rating	280 W
Vibrations	0 – 20000 min^{-1}
Oscillating circuit	2.0 mm
Sanding area	Eccentric: Ø 125 mm Rectangle: 140 x 115 mm Delta: 174 x 105 mm
Standard accessories	Sanding disc (eccentric, delta, rectangle), 16 abrasive papers, dust extractor adapter, dust collection box
Net weight | gross weight	2.3 kg | 2.8 kg
Packing dimensions	330 x 125 x 200 mm
Packaging unit	8
Article number	44.191.30
EAN code	4 006825 537598



Changeable sanding disc



Speed control electronics




Dust collection box with filter



Adjustable additional handle

Einhell Germany AG

ABRASIVE PAPER-SET
for RT-XS 28
20 pieces



Art. No.	44.602.80
PU	1
EAN code	4 006825 547092

You will find an extensive range of abrasive papers, multitool and other accessories at:

kwb

www.kwb.eu



ORBITAL SANDER


TC-OS 1520





DE: price/performance "Good – Very good"

Mains connection	230 V ~ 50 Hz
Power rating	150 W
Vibrations	23000 min^{-1}
Oscillating circuit	2.0 mm
Sanding area	90 x 187 mm
Abrasive paper size	93 x 230 mm (93 x 187 with Velcro)
Standard accessories	3 abrasive papers (P120), dust ectractor adapter
Net weight | gross weight	1.1 kg | 1.4 kg
Packing dimensions	270 x 160 x 100 mm
Packaging unit	10
Article number	44.606.40
EAN code	4 006825 593693

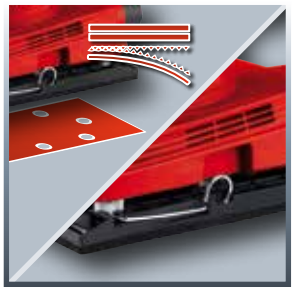

Universal paper-fixing system



XL grip areas



Compact easy-to-use design



Incl. dust extraction adapter

Note: For safe handling of the products please refer to the instructions in the operating manual.

ORBITAL SANDER

TE-OS 2520 E



DE: rating "Good"

Mains connection	230 V ~ 50 Hz
Power rating	250 W
Vibrations	14000 - 24000 min^{-1}
Oscillating circuit	2.0 mm
Sanding area	115 x 230 mm
Abrasive paper size	115 x 280 mm (115 x 230 with Velcro)
Standard accessories	1 abrasive paper (P120), dust collection box, transport and storage case
Net weight | gross weight	2.3 kg | 3.7 kg
Packing dimensions	430 x 139 x 255 mm
Packaging unit	4
Article number	44.606.20
EAN code	4 006825 592498

ORBITAL SANDER

RT-OS 30





Mains connection	230 V ~ 50 Hz
Power rating	300 W
Vibrations	14000 – 22000 min^{-1}
Oscillating circuit	2.0 mm
Sanding area	115 x 227 mm
Abrasive paper size	115 x 280 mm (115 x 230 with Velcro)
Standard accessories	1 abrasive paper (P120), dust extractor adapter, dust collection box
Net weight | gross weight	2.4 kg | 2.9 kg
Packing dimensions	348 x 193 x 118 mm
Packaging unit	6
Article number	44.605.50
EAN code	4 006825 537550



Universal paper-fixing system



Robust aluminum sole plate



Speed control electronics



Dust collection box with filter



Compact easy-to-use design



Dust collection box with filter



Fixation with/without Velcro fastening



Softgrip and cable clip

ECCENTRIC SANDER

TC-RS 38 E



Mains connection	230 V ~ 50 Hz
Power rating	380 W
Vibrations	12000 – 26000 min^{-1}
Oscillating circuit	2.0 mm
Sanding area	Ø 125 mm
Abrasive paper size	Ø 125 mm
Standard accessories	Dust collection bag, 1 abrasive paper
Net weight | gross weight	2.0 kg | 2.2 kg
Packing dimensions	305 x 123 x 188 mm
Packaging unit	10
Article number	44.621.65
EAN code	4 006825 603811



Simple and fast sandpaper attachment



Large, ergonomic handle surfaces for comfort



Practical dust catch bag for maximum cleanliness



Rotary motion achieves a high rate of material removal

ECCENTRIC SANDER

TE-RS 40 E



Mains connection	230 V ~ 50 Hz
Power rating	400 W
Vibrations	12000 - 24000 min^{-1}
Oscillating circuit	2.5 mm
Sanding area	Ø 125 mm
Abrasive paper size	Ø 125 mm
Standard accessories	Dust collection box, transport and storage case
Net weight | gross weight	2.1 kg | 3.7 kg
Packing dimensions	437 x 148 x 260 mm
Packaging unit	4
Article number	44.620.00
EAN code	4 006825 590661



Speed control electronics



Dust collection box with filter



Durable sturdy construction



Rotary motion achieves a high rate of material removal

BELT SANDER

TC-BS 8038





Mains connection	230 V ~ 50 Hz
Power rating	800 W
Belt speed	380 m/min
Sanding area	76 x 142 mm
Sanding belt size	76 x 533 mm
Standard accessories	1 sanding belt (P80), dust collection bag
Net weight | gross weight	3.4 kg | 3.7 kg
Packing dimensions	370 x 155 x 173 mm
Packaging unit	6
Article number	44.662.60
EAN code	4 006825 598360


BELT SANDER

TE-BS 8540 E





Mains connection	230 V ~ 50 Hz
Power rating	850 W
Belt speed	300 – 400 m/min
Sanding area	75 x 140 mm
Sanding belt size	75 x 533 mm
Standard accessories	1 sanding belt (P80), dust box, dust extractor adapter
Net weight | gross weight	3.1 kg | 3.8 kg
Packing dimensions	414 x 175 x 176 mm
Packaging unit	4
Article number	44.662.30
EAN code	4 006825 537307

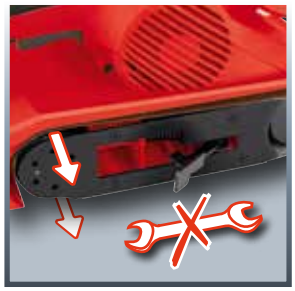

Easy, tool-free belt change



Precise belt adjustment



Variable belt speed



Folding front cover



Ergonomically designed for a secure hold



Rotary motion achieves a high rate of material removal



Adjustable additional handle




Dust collection box with filter



Note: For safe handling of the products please refer to the instructions in the operating manual.

DRYWALL POWER SANDER


TC-DW 225

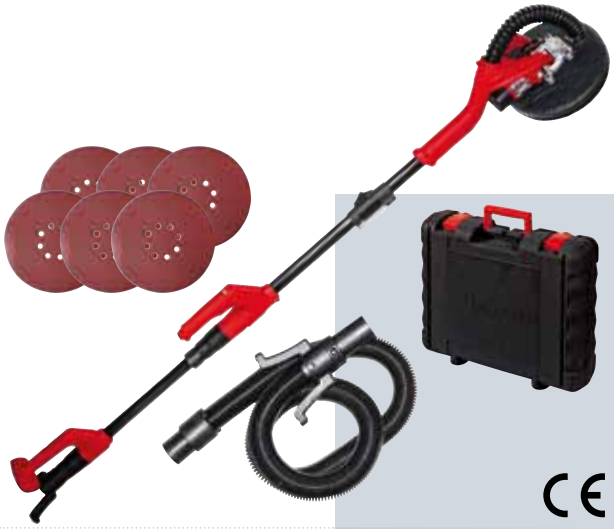

Mains connection	230 - 240 V ~ 50 Hz
Power rating	600 W
Speed	600 – 1500 min^{-1}
Abrasive paper size	Ø 225 mm
Length	110 cm – 165 cm
Hose length | cable length	4.0 m | 4.0 m
Standard accessories	6 sanding discs, transport and storage case
Net weight | gross weight	3.2 kg | 10.0 kg
Packing dimensions	680 x 215 x 335 mm
Packaging unit	2
Article number	42.599.30
EAN code	4 006825 601671



Movable grinding head – adjusts to any pitch and angle

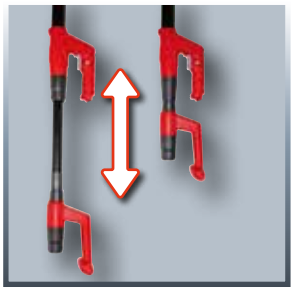

Long handle with tool-free telescopic action – carrying out work on high walls is no problem



Collapsible long handle – folded in for storage and folded out ready for use in an instant



Stand specially designed to prevent kinks from forming in the suction hose

CORDLESS TACKER

TC-CT 3,6 Li

NEW!



Battery pack	3.6 V / 1300 mAh / Li-Ion
Shots per minute	30
Staple length	6 - 14 mm
Staple type	53
Staple thickness	0.75 mm
Staple width	11.4 mm
Charging time	3 - 5 h
Standard accessories	Incl. 1000 staples, battery charger, metal box
Net weight | gross weight	0.9 kg | 1.5 kg
Packing dimensions	189 x 184 x 131 mm
Packaging unit	6
Article number	42.578.80
EAN code	4 006825 607291



Integrated lithium-ion battery



A safety lug ensures that staples are released only in working position



Ergonomic handle with soft grip




Well visible magazine level indication

Einhell Germany AG

ABRASIVE PAPER SET

for TC-DW 225
10 pieces



Art. No.	42.599.21
PU	1
EAN code	4 006825 607673

STAPLES, TYPE 53

for TC-CT 3.6 Li
1000 pieces, 11.4 x 8 mm

NEW!



Art. No.	41.378.84
PU	1
EAN code	4 006825 610130



HOT AIR GUN

TC-HA 2000/1



CE

Mains connection	230 / 240 V ~ 50 Hz
Power rating	max. 2000 W
Air flow | temperature	1st setting: 300 l/min | 350 °C 2nd setting: 500 l/min | 550 °C
Standard accessories	Wide jet nozzle, reducer nozzle
Net weight | gross weight	0.7 kg | 0.9 kg
Packing dimensions	240 x 82 x 240 mm
Packaging unit	10
Article number	45.201.84
EAN code	4 006825 602227



Safe operation thanks to overheating guard



Safe stand in case of stationary operation



Including wide jet nozzle, reducer nozzle



With two-step switch
(2 heat settings / 2 air settings)

Note: For safe handling of the products please refer to the instructions in the operating manual.

HOT AIR GUN

TH-HA 2000/1



Mains connection	230 / 240 V ~ 50 Hz
Power rating	max. 2000 W
Air flow | temperature	1st setting: 300 l/min | 350 °C 2nd setting: 500 l/min | 550 °C
Standard accessories	4 nozzles, 1 paint scraper, transport and storage case
Net weight | gross weight	0.7 kg | 1.6 kg
Packing dimensions	296 x 85 x 272 mm
Packaging unit	10
Article number	45.201.79
EAN code	4 006825 593235

HOT AIR GUN

TE-HA 2000 E



Mains connection	220 – 240 V ~ 50 Hz
Power rating	max. 2000 W
Air flow | temperature	1st setting: 250 l/min | 50°C 2nd setting: 250 l/min | 50 – 550°C 3rd setting: 500 l/min | 50 – 550°C
Standard accessories	4 nozzles (1x reflector nozzle, 1x wide jet nozzle, 1x reducer nozzle, 1x glass protection nozzle), transport and storage case
Net weight | gross weight	0.9 kg | 2.2 kg
Packing dimensions	358 x 112 x 280 mm
Packaging unit	5
Article number	45.201.95
EAN code	4 006825 602678



Safe operation thanks to overheating guard



Safe stand in case of stationary operation


Safe stand in case of stationary operation



Cold setting – for faster nozzle change


Wide range of accessories



With two-step switch
(2 heat settings / 2 air settings)


Temperature display with adjustment dial


Wide range of accessories

Cut clean through the wood.



Andreas Sporrer
(Product trainer, Einhell Germany AG)

The wide range of Einhell bench-type circular saws and crosscut and miter saws did not make for an easy choice. Finally, though, I opted for the handy TE-SM 2131 Dual and am perfectly happy with it. Optimum performance, ideal adjustment options, clean work results - that's what I expect from a good machine. And that's what made the treehouse for my son a luxury apartment!

Note: For safe handling of the products please refer to the instructions in the operating manual.

STATIONARY SAWS FROM EINHELL

THE RIGHT TOOL FOR EVERY JOB!



CROSSCUT AND MITER SAWS

The right tool for every project...

Einhell crosscut saws provide impressive saw blade quality. They make the cut with ease in all DIY applications. Einhell supplies cross-cut and miter saws and crosscut and miter saws with drag function that make short work of even wide workpieces.



Crosscut and miter saws


Crosscut and miter saws with drag function

... and all with optimum features!

The large selection of crosscut and miter saws with or without drag function has the right machine for everyone. And all of them come with...

Workpiece support or X-Tend

Secure support for longer workpieces: specially shaped metal rail or Einhell's own X-Tend aluminum supports with one-handed operation.



Angled cuts on both sides

Efficient machine ergonomics get the job done quicker and easier and that includes the Einhell dual function that comes with drag, crosscut and miter saws.



LED light and laser

Work safely, accurately and fast - even in difficult light conditions.



Dust bag

Clean air in the workplace – the dust bag supplied with the saw helps to create a more pleasant and healthier environment. Connections to the extractor system are always provided.



BENCH-TYPE CIRCULAR SAWS

The right tool for every project ...

Einhell saws meet every DIY enthusiast's needs and cover an extremely wide range of applications: The Einhell range provides semi-stationary bench-type circular saws, bench-type circular saws with a base frame, format circular saws and bench-type circular saws with or without AC connection and handy accessories such as a slide and equipment for extracting dust and chips.



Semi-stationary bench-type circular saws

Bench-type circular saws (with or without AC connection)

Bench-type circular saw with format function

Bench-type circular saws with base frame

... and all with optimum features!

The large selection of Einhell bench-type circular saws has the perfect machine for any project. And all of them come with ...


Performance-optimized motors

Optimum performance for every type of saw. Delivering the power reserves needed for every project.




Maximum work area ...

... and a minimum transport size. Einhell saws go large for working and shrink for transport and storage.



Ideal adjustment options ...

... for all designated applications. Clean and safe cuts in any application.



Dust extraction

The ability to extract dust directly at the machine with a wet and dry vacuum cleaner provides for a clean and safe workplace.





CROSSCUT AND MITRE SAW WITH TABLE

TC-MS 2112 T



Mains voltage	230 V ~ 50 Hz
Rating	1200 W S1
Speed	4500 min^{-1}
TCT saw blade	Ø 210 x Ø 30 mm
Number of teeth	24
Swiveling range	-45° to +45°
Mitre cut	0° to +45° to the left
Max. cutting width	120 x 55 mm (at 90°)
Net weight | gross weight	11.0 kg | 14.2 kg
Packing dimensions	425 x 405 x 305 mm
Packaging unit	1
Article number	43.003.17
EAN code	4 006825 584950



2 in 1: Crosscut saw and bench-type circular saw function



Precise angular cuts



Variable cutting height



TCT saw blade in professional quality

Note: For safe handling of the products please refer to the instructions in the operating manual.

CROSSCUT AND MITER SAW WITH TABLE

TC-MS 2513 T



Mains voltage	230 V ~ 50 Hz
Rating	1800 W S1
Speed	4500 min^{-1}
TCT saw blade	Ø 250 x Ø 30 mm
Number of teeth	36
Swiveling range	-45° to +45°
Mitre cut	0° to +45° to the left
Max. cutting width	130 x 75 mm (at 90°)
Net weight | gross weight	13.5 kg | 15.5 kg
Packing dimensions	545 x 470 x 375 mm
Packaging unit	1
Article number	43.003.45
EAN code	4 006825 584967



2 in 1: Crosscut saw and bench-type circular saw function



Precise angular cuts



Variable cutting height



TCT saw blade in professional quality

Einhell Germany AG

You will find an extensive range of saw blades and other accessories at:

kwb

www.kwb.eu




MITRE SAW

TC-MS 2112



CE

Mains voltage	230 V ~ 50 Hz
Rating	1600 W S6 40%
Speed	5000 min^{-1}
TCT saw blade	Ø 210 x Ø 30 mm
Number of teeth	48
Swiveling range	-45° to +45°
Mitre cut	0° to 45° to the left
Max. cutting width	120 x 55 mm (at 90°)
Net weight | gross weight	7.4 kg | 8.7 kg
Packing dimensions	480 x 320 x 290 mm
Packaging unit	1
Article number	43.002.95
EAN code	4 006825 584929



Precise angular cuts



Secure fastening of the workpieces



Easy saw blade change



TCT saw blade in professional quality

Note: For safe handling of the products please refer to the instructions in the operating manual.

MITRE SAW


TE-MS 2112 L



selbst ist der Mann
Das Do-it-yourself-Magazin
SELBST AUSPROBIERT
FAZIT: TTTTT
Bewertet mit „SEHR GUT"
Ausgabe 8/2013
www.selbst.de

DE: rating "Very good"

Mains voltage	230 V ~ 50 Hz
Rating	1400 W S6 20%
Speed	5000 min^{-1}
TCT saw blade	Ø 210 x Ø 30 mm
Number of teeth	48
Swiveling range	-47° bis +47°
Mitre cut	0° to 45° to the left
Max. cutting width	120 x 60 mm (at 90°)
Net weight | gross weight	8.7 kg | 10.3 kg
Packing dimensions	540 x 380 x 340 mm
Packaging unit	1
Article number	43.008.40
EAN code	4 006825 582420



Precise angular cuts



Includes laser and LED illumination of the cutting area (mains-powered)



Secure fastening of the workpieces




TCT saw blade in professional quality

MITRE SAW

TC-MS 2513 L



Mains voltage	230 V ~ 50 Hz
Rating	1600 W S1
Speed	4000 min^{-1}
TCT saw blade	Ø 250 x Ø 30 mm
Number of teeth	48
Swiveling range	-45° to +45°
Mitre cut	0° to 45° to the left
Max. cutting width	130 x 75 mm (at 90°)
Net weight | gross weight	9.8 kg | 11.1 kg
Packing dimensions	535 x 400 x 410 mm
Packaging unit	1
Article number	43.008.50
EAN code	4 006825 592122



Precise angular cuts



Includes laser (mains-powered) for precise guidance while cutting



Secure fastening of the workpieces



TCT saw blade in professional quality

DRAG, CROSSCUT AND MITRE SAW


TC-SM 2131 Dual



Mains voltage	230 V ~ 50 Hz
Rating	1800 W S2 5 min
Speed	5000 min^{-1}
TCT saw blade	Ø 210 x Ø 30 mm
Number of teeth	48
Swiveling range	-45° to +45°
Mitre cut	-45° to +45°
Max. cutting width	310 x 62 mm (at 90°)
Net weight | gross weight	11.9 kg | 14.2 kg
Packing dimensions	725 x 455 x 395 mm
Packaging unit	1
Article number	43.008.35
EAN code	4 006825 584936



Integrated drag function for wide workpieces



Precise angular cuts



Includes laser (mains-powered) for precise guidance while cutting



TCT saw blade in professional quality

DRAG, CROSSCUT AND MITRE SAW


TE-SM 2131 Dual



Mains voltage	230 V - 240 V ~ 50 Hz
Rating	1600 W S6 20%
Speed	5000 min^{-1}
TCT saw blade	Ø 210 x Ø 30 mm
Number of teeth	48
Swiveling range	-47° to +47°
Mitre cut	-45° to +45°
Max. cutting width	310 x 65 mm (at 90°)
Net weight | gross weight	13.2 kg | 16.1 kg
Packaging unit	830 x 490 x 335 mm
Packaging unit	1
Article number	43.008.60
EAN code	4 006825 599527



Integrated drag function for wide workpieces



Precise angular cuts



Includes laser (mains-powered) for precise guidance while cutting



TCT saw blade in professional quality

DRAG, CROSSCUT AND MITRE SAW

TC-SM 2534 Dual



Mains voltage	230 V ~ 50 Hz
Rating	2350 W S6 25%
Speed	4000 min^{-1}
TCT saw blade	Ø 250 x Ø 30 mm
Number of teeth	48
Swiveling range	-45° to +45°
Mitre cut	-45° to +45°
Max. cutting width	340 x 75 mm (at 90°)
Net weight | gross weight	16.1 kg | 19.5 kg
Packing dimensions	800 x 575 x 455 mm
Packaging unit	1
Article number	43.008.25
EAN code	4 006825 584943



Integrated drag function for wide workpieces



Precise angular cuts



Includes laser (mains-powered) for precise guidance while cutting



TCT saw blade in professional quality

DRAG, CROSSCUT AND MITRE SAW


TE-SM 2534 Dual



Mains voltage	230 V - 240 V ~ 50 Hz
Rating	1800 W
Speed	5100 min^{-1}
TCT saw blade	Ø 250 x Ø 30 mm
Number of teeth	48
Swiveling range	-47° to +47°
Mitre cut	-45° to +45°
Max. cutting width	310 x 90 mm (at 90°)
Net weight | gross weight	15.8 kg | 18.3 kg
Packaging unit	905 x 606 x 365 mm
Packaging unit	1
Article number	43.008.70
EAN code	4 006825 599534



Integrated drag function for wide workpieces



Precise angular cuts



Includes laser (mains-powered) for precise guidance while cutting




TCT saw blade in professional quality

TABLE SAW

TC-TS 820



Mains voltage	230 V ~ 50 Hz
Rating	800 W S2 10 min
Speed	2950 min^{-1}
Maximum cutting height	45 mm (90°), 35 mm (45°)
TCT saw blade	Ø 200 x Ø 16 mm | 24 teeth
Swiveling range	0° to 45° to the left
Bench size	500 x 335 mm
Net weight | gross weight	11.6 kg | 12.7 kg
Packing dimensions	520 x 355 x 335 mm
Packaging unit	1
Article number	43.404.10
EAN code	4 006825 590784



Saw blade adjustment (angle)



Parallel guide with two stop heights



TCT saw blade



Chip extractor

TABLE SAW

RT-TS 920



Mains voltage	230 - 240 V ~ 50 Hz
Rating	900 W S1
Speed	4800 min^{-1}
Maximum cutting height	45 mm (90°), 42 mm (45°)
TCT saw blade	Ø 205 x Ø 16 mm | 24 teeth
Swiveling range	0° to 45° to the left
Bench size	525 x 400 mm
Net weight | gross weight	14.7 kg | 16.3 kg
Packing dimensions	580 x 455 x 340 mm
Packaging unit	1
Article number	43.407.32
EAN code	4 006825 541267



Saw blade adjustment (height and angle)



Parallel guide and cross stop



TCT saw blade



Chip extractor

TABLE SAW

RT-TS 1221

WITH BENCH EXTENSION



Mains voltage	230 - 240 V ~ 50 Hz
Rating	1200 W
Speed	4800 min^{-1}
Maximum cutting height	48 mm (90°), 45 mm (45°)
TCT saw blade	Ø 210 x Ø 30 mm | 24 teeth
Swiveling range	0° bis 45° to the left
Bench size (without extension)	525 x 400 mm
Bench size max.	525 x 620 mm
Net weight | gross weight	13.4 kg | 17.9 kg
Packing dimensions	580 x 455 x 340 mm
Packaging unit	1
Article number	43.407.41
EAN code	4 006825 541250

TABLE SAW

TC-TS 2025 eco

NEW!


WITH BASE FRAME



Mains voltage	220 - 240 V ~ 50 Hz
Rating	2000 W S6 25%
Speed	5000 min^{-1}
Maximum cutting height	85 mm (90°), 48 mm (45°)
TCT saw blade	Ø 250 x Ø 30 mm | 24 teeth
Swiveling range	0° bis 45° to the left
Cross stop tiltable	-60° to +60°
Bench size max.	640 x 487 mm
Net weight | gross weight	19.7 kg | 22.2 kg
Packing dimensions	710 x 560 x 320 mm
Packaging unit	1
Article number	43.405.30
EAN code	4 006825 611328



Saw blade adjustment (height and angle)



Bench extension



Parallel guide and cross stop individually adjustable




2in1 saw blade adjustment (height, angle 0°-45°)2 in 1 saw blade adjustment



TCT saw blade



Chip extractor



Blade height and angle are easy to adjust



Connection for vacuum extraction system Ø 36 mm

TABLE SAW

TC-TS 2025 U

WITH BASE FRAME AND BENCH EXTENSION

NEW!



Mains voltage	220 - 240 V ~ 50 Hz
Rating	2000 W S6 25%
Speed	5000 min^{-1}
Maximum cutting height	85 mm (90°), 48 mm (45°)
TCT saw blade	Ø 250 x Ø 30 mm | 24 teeth
Swiveling range	0° bis 45° to the left
Cross stop tiltable	-60° to +60°
Bench size max.	640 x 487 (887) mm
Net weight | gross weight	20.2 kg | 22.7 kg
Packing dimensions	710 x 560 x 320 mm
Packaging unit	1
Article number	43.405.40
EAN code	4 006825 608953

TABLE SAW

TE-TS 1825 U

WITH BASE FRAME



Mains voltage	230 – 240 V ~ 50 Hz
Rating	1800 W S6 40%
Speed	6000 min^{-1}
Maximum cutting height	75 mm (90°), 53 mm (45°)
TCT saw blade	Ø 250 x Ø 30 mm | 24 teeth
Swiveling range	0° to 45° to the left
Cross stop tiltable	-60° to +60°
Bench size max.	610 (930) x 445 (945) mm
Net weight | gross weight	25.3 kg | 27.5 kg
Packing dimensions	730 x 590 x 360 mm
Packaging unit	1
Article number	43.405.60
EAN code	4 006825 582444



Incl. parallel guide and cross stop



Blade height and angle are easy to adjust



2 in 1 saw blade adjustment (height and angle)



Optimized for wide and long workpieces



Bench width extension for wide workpieces



Practical holder for blade and tool



Parallel guide with eccentric clamp and additional cross stop



Extra-sturdy base frame with compensation feature for uneven floors

TABLE SAW
WITH FORMAT FUNCTION

TE-CC 1825 U

WITH BASE FRAME



Mains voltage	230 V ~ 50 Hz
Rating	1800 W S6 40%
Speed	4500 min^{-1}
Maximum cutting height	75 mm (90°), 53 mm (45°)
TCT saw blade	Ø 250 x Ø 30 mm | 48 teeth
Swiveling range	-2° to 47° to the left
Bench size max.	625 x 740 (1090) mm
Sliding table size	625 x 150 mm
Slide length	770 mm
Net weight | gross weight	27.1 kg | 31.8 kg
Packing dimensions	800 x 750 x 340 mm
Packaging unit	1
Article number	43.405.50
EAN code	4 006825 582437


TABLE SAW

RT-TS 2031 U

WITH BASE FRAME




Mains voltage	230 V ~ 50 Hz
Rating	2000 W S6 20%
Speed	2800 min^{-1}
Maximum cutting height	83 mm (90°), 60 mm (45°)
TCT saw blade	Ø 315 x Ø 30 mm | 24 teeth
Swiveling range	0° to 45°
Bench size max.	800 (1600) x 550 mm
Machine size without bench extension	900 x 570 x 1050 mm
Net weight | gross weight	50.2 kg | 53.5 kg
Packing dimensions	890 x 600 x 450 mm
Packaging unit	1
Article number	43.071.53
EAN code	4 006825 541274



Operating slide for precise cross cuts


Bench extension with XXL stop bar



Saw blade adjustment (height and angle)


Multi-function stop


2 in 1 saw blade adjustment (height and angle)


Easy transport


Bench length extension


Easy transport

TABLE SAW

TE-TS 2231 U

WITH BASE FRAME



Mains voltage	230 V ~ 50 Hz
Rating	2200 W S6 20%
Speed	2800 min^{-1}
Maximum cutting height	83 mm (90°), 50 mm (45°)
TCT saw blade	Ø 315 x Ø 30 mm | 24 teeth
Swiveling range	0° to 45° to the left
Cross stop tiltable	-60° to +60°
Bench size max.	800 (1450) x 550 mm
Net weight | gross weight	45.5 kg | 50.0 kg
Packing dimensions	865 x 585 x 480 mm
Packaging unit	1
Article number	43.071.56
EAN code	4 006825 598278



Long-lasting induction motor



Robust base frame



Easy transport



Complete with kwb branded carbide saw blade

TABLE SAW

TE-TS 2831 UD

WITH BASE FRAME AND THREE-PHASE CURRENT



Mains voltage	400 V 3 ~ 50 Hz
Rating	2800 W S6 20 %
Speed	2800 min^{-1}
Maximum cutting height	83 mm (90°), 50 mm (45°)
TCT saw blade	Ø 315 x Ø 30 mm | 24 teeth
Swiveling range	0° to 45° to the left
Cross stop tiltable	-60° to +60°
Bench size max.	800 (1450) x 550 mm
Net weight | gross weight	45.5 kg | 50.0 kg
Packing dimensions	865 x 585 x 480 mm
Packaging unit	1
Article number	43.071.44
EAN code	4 006825 598261



Long-lasting induction motor with AC connection



Robust base frame



Easy transport




Complete with kwb branded carbide saw blade

SLIDE




Slide length	730 mm
Suitable accessory for	TE-TS 2231 U, TE-TS 2831 UD, RT-TS 2031 U
Net weight | gross weight	6.2 kg | 7.5 kg
Packing dimensions	990 x 280 x 165 mm
Packaging unit	1
Article number	43.106.25
EAN code	4 006825 598285

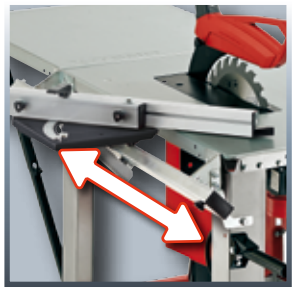


Expands the range of options and precision of bench-type circular saws



Easy assembly

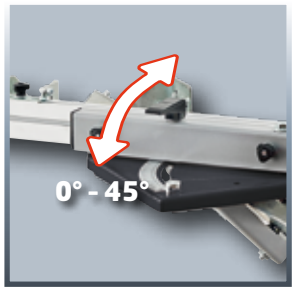

Cross stop with angle setting from 0° to 45°

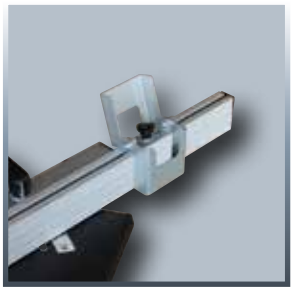

Integrated limit stop for simple repeat work

Einhell Germany AG

kwb

THE SPECIAL SAW BLADE FROM KWB

- Brand quality
- For the optimum in longitudinal cuts
- Special tooth geometry produces ultra-precise cuts
- Laser production processes support the highest standards of workmanship



- Top quality materials guarantee a long service life and a high standard of cut
- Standard accessory for TE-TS 2231 U and TE-TS 2831 UD





STATIONARY PLANER

TH-SP 204




CE

Mains voltage	230 V ~ 50 Hz
Rating	1280 W
Plane blade speed	9200 min^{-1}
Max. material removal	3 mm
Max. working width	204 mm
Max. height at thickness opening	120 mm
Feed speed	8 m/min
Max. angle of the parallel guide	45°
Net weight | gross weight	27.5 kg | 30.2 kg
Packing dimensions	850 x 450 x 440 mm
Packaging unit	1
Article number	44.199.50
EAN code	4 006825 588859



Sturdy, solid construction

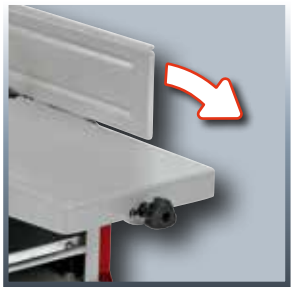

Surface plane with stop for chamfering



Thickness planer with pull-out workpiece support



Dust ectraction 100 mm


Note: For safe handling of the products please refer to the instructions in the operating manual.

BAND SAW

TC-SB 200



Mains voltage	230 V ~ 50 Hz
Rating	250 W S2 15 min
Speed	1400 min^{-1}
Blade speed	900 m/min
Bandsaw blade	1400 x 7 mm | 6 teeth / 25.4 mm
Maximum cutting height	80 mm (90°)
Reach	200 mm
Swiveling range	-4° bis 46°
Table size	300 x 300 mm
Net weight | gross weight	15.4 kg | 17.6 kg
Packing dimensions	370 x 720 x 280 mm
Packaging unit	1
Article number	43.080.15
EAN code	4 006825 589917

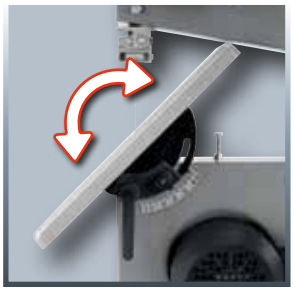

Infinitely tilting saw table



Height adjustment of blade bearings for greater sawing accuracy



Parallel stop guide



Connection for vacuum extraction system 36 mm

SCROLL SAW

TC-SS 405 E

NEW!



Mains voltage	230 V ~ 50 Hz
Rating	120 W | S2 10 min
Number of strokes	400 – 1600 min^{-1}
Stroke height	14 mm
Saw blade	127 mm
Maximum cutting height	52 mm (90°)
Reach	406 mm
Swiveling range	0° to 45°
Table size	408 x 250 mm
Net weight | gross weight	9.0 kg | 10.4 kg
Packing dimensions	647 x 302 x 326 mm
Packaging unit	1
Article number	43.090.40
EAN code	4 006825 589900




Infinitely tilting machine table



Quick-release clamp makes it easy to change the saw blade



Electronic blade speed controller for handling a variety of materials

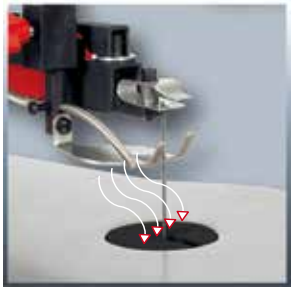

Height adjustable blow-off device



STATIONARY BELT GRINDER

TH-US 240



CE

Mains voltage	230 V ~ 50 Hz
Rating	240 W S2 30 min
Speed	2950 min^{-1}
Grinding wheel dimensions	Ø 150 x Ø 12.7 x 20 mm
Grinding/sanding belt dimensions	50 x 686 mm
Belt speed	900 m/min.
Net weight | gross weight	7.3 kg | 8.3 kg
Packing dimensions	410 x 350 x 230 mm
Packaging unit	1
Article number	44.661.50
EAN code	4 006825 595789



2 tool supports ensure maximum variability



Adjustable spark guard window for safety when working



Rubber feet for safe, low-vibration stability



Sturdy, compact design in metal

Note: For safe handling of the products please refer to the instructions in the operating manual.

STATIONARY BELT-DISC GRINDER


TC-US 400



Mains voltage	230 V ~ 50 Hz
Rating	375 W S2 30 min
Speed	1450 min^{-1}
Grinding wheel	Ø 150 mm
Grinding /sanding belt	915 x 100 mm
Table incline	0° to 45°
Cross stop swivel range	-60° to +60°
Net weight | gross weight	12.1 kg | 12.9 kg
Packing dimensions	500 x 312 x 253 mm
Packaging unit	1
Article number	44.192.55
EAN code	4 006825 601930

WOODWORKING LATHE

TC-WW 350

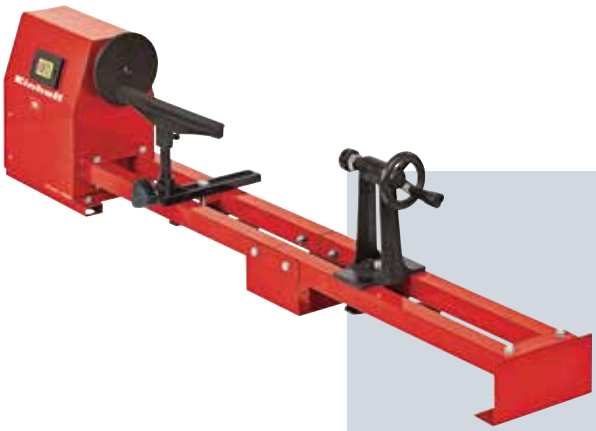

Mains voltage	230 V ~ 50 Hz
Rating	350 W S2 15 min
Max. lathe diameter	356 mm
Tip width	1000 mm
Spindle speed	810 / 1180 / 1700 / 2480 min^{-1}
Net weight | gross weight	22.5 kg | 24.2 kg
Packing dimensions	875 x 220 x 497 mm
Packaging unit	1
Article number	43.121.05
EAN code	4 006825 600438



Swiveling belt grinding/sanding device with workpiece stop




Disc grinder/sander with Velcro fastening system



Four adjustable speed settings



Tailstock with live spindle tip for securing and centering the workpiece , tool-free adjustable

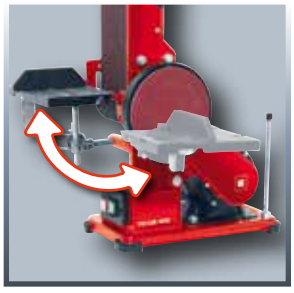

Tilting and swiveling aluminum support table, versatile usable



Connection for dust extractor for a clean workplace



Robust, tool-free adjustable tool support



Front end driver and face plate for many different applications

BASE FRAME

E-STAND



multifunctional

Assembly width	340 – 445 mm
Assembly depth	max. 410 mm
Working height	81 cm
Can be combined with	TE-SM 2131 Dual, TE-SM 2534 Dual, TH-MS 2112, TH-MS 2513 L, TE-MS 2112 L, TH-SM 2131 Dual, TH-SM 2534 Dual, TC-MS 2112, TC-SM 2131 Dual, TC-SM 2534 Dual
Net weight | gross weight	10.4 kg | 11.4 kg
Packing dimensions	795 x 340 x 120 mm
Packaging unit	1
Article number	43.106.20
EAN code	4 006825 584974

CHIP AND DUST EXTRACTION SYSTEM


RT-VE 550



Mains voltage	220 - 240 V ~ 50 Hz
Rating	550 W S1
Speed	2900 min^{-1}
Debris bag volume	65 l
Air capacity	1150 m^3/h
Vacuum	max. 1600 Pa
Dust extraction connector	Ø 100 mm / Ø 36 mm
Hose length	2.5 m
Net weight | gross weight	20.0 kg | 23.0 kg
Packing dimensions	890 x 540 x 380 mm
Packaging unit	1
Article number	43.041.40
EAN code	4 006825 554649



One height adjustable foot for level control



Can be used for semi-stationary machines of various sizes

can be combined with



Mitre saws



Table saws



Aluminium assembly rail with sliding blocks



Sturdy X-strutting apart



Bandsaws



Stationary planes

TCT SAW BLADE

for RT-XM 305 U
48 teeth | Ø 250 x Ø 30 x 2.2 mm

Art. No. 45.021.57
PU 1
EAN code 4 006825 563191



TCT SAW BLADE

for RT-TS 920
20 teeth | Ø 205 x Ø 16 x 2.5 mm

Art. No. 45.020.39
PU 1
EAN code 4 006825 456066



TCT SAW BLADE

for RT-TS 920
48 teeth | Ø 205 x Ø 16 x 2.5 mm

Art. No. 45.020.33
PU 1
EAN code 4 006825 456172



TCT SAW BLADE-SET

for RT-SM 305 L, TC-MS 2112, TE-MS 2112 L, TC-SM 2131 Dual, TE-SM 2131 Dual, RT-TS 1221
24 teeth | Ø 210 x Ø 30 x 2.8 mm

Art. No. 45.020.48
PU 1
EAN code 4 006825 456004



TCT SAW BLADE

for TC-MS 2513 L, TC-SM 2534 Dual, TE-SM 2534 Dual, TC-TS 2025 eco, TC-TS 2025 U, TE-TS 1825 U, TE-CC 1825 U
24 teeth | Ø 250 x Ø 30 x 3.2 mm

Art. No. 43.111.10
PU 1
EAN code 4 006825 431223



TCT SAW BLADE KIT

for TC-TS 2025 eco, TC-TS 2025 U
Ø 250 x Ø 30 x 3.0 mm,
1x 24 teeth, 1x 48 teeth, 1x 60 teeth


Art. No. 45.021.33
PU 1
EAN code 4 006825 534276



PROFESSIONAL TURNING TOOL SET

5-part, flat and round nose chisel, gouge chisel, round and pointed chisel


Art. No. 43.112.00
PU 1
EAN code 4 006825 431551



TCT SAW BLADE

for TC-TS 820
20 teeth | Ø 200 x Ø 16 x 2.8 mm


Art. No. 45.020.46
PU 1
EAN code 4 006825 453706



TCT SAW BLADE

for TC-MS 2513 L, TC-SM 2534 Dual, TE-SM 2534 Dual, TC-TS 2025 eco, TC-TS 2025 U, TE-TS 1825 U, TE-CC 1825 U
48 teeth | Ø 250 x Ø 30 x 3.2 mm


Art. No. 43.111.11
PU 1
EAN code 4 006825 431230



TCT SAW BLADE KIT

for TH-MS 2112, TC-MS 2112, TE-MS 2112 L, TC-SM 2131 Dual, TE-SM 2131 Dual
Ø 210 x Ø 30 x 2.5 mm,
1x 24 teeth, 1x 48 teeth, 1x 60 teeth


Art. No. 45.021.32
PU 1
EAN code 4 006825 534269



TCT SAW BLADE

for RT-SM 305 L, TC-MS 2112, TE-MS 2112 L, TC-SM 2131 Dual, TE-SM 2131 Dual, RT-TS 1221
48 teeth | Ø 210 x Ø 30 x 2.8 mm


Art. No. 45.020.34
PU 1
EAN code 4 006825 456110



TCT SAW BLADE

for TC-MS 2513 L, TC-SM 2534 Dual, TE-SM 2534 Dual, TC-TS 2025 eco, TC-TS 2025 U, TE-TS 1825 U, TE-CC 1825 U
60 teeth | Ø 250 x Ø 30 x 3.2 mm


Art. No. 43.111.13
PU 1
EAN code 4 006825 503166



TCT SAW BLADE

for RT-TS 2031 U, RT-TS 2231 UD, TE-TS 2231 U, TE-TS 2831 UD, RT-CC 315 U
40 teeth | Ø 315 x Ø 30 x 3.0 mm

Art. No. 45.020.11
PU 1
EAN code 4 006825 456295



Further accessories from kwb

www.kwb.eu

SAW BAND

for TH-SB 200, TC-SB 200
1400 x 6.5 mm
6 teeth / 25 mm



Art. No. 45.061.56
PU 1
EAN code 4 006825 508116

SAW BAND

for RT-SB 250 U
1790 X 9.5 mm
6 teeth / 25.4 mm



Art. No. 43.111.18
PU 1
EAN code 4 006825 568875

SAW BAND


for RT-SB 305 U
2240 X 12 mm
4 teeth / 25 mm



Art. No. 43.111.17
PU 1
EAN code 4 006825 516463

SAW BLADE KIT


for TH-SS 405 E, TH-SS 405 EL,
TC-SS 405 E
5 saw blades



Art. No. 45.062.00
PU 1
EAN code 4 006825 453928

SPARE BLADE


for TH-SP 204



Art. No. 43.113.10
PU 1
EAN code 4 006825 598018

VACUUM ADAPTER SET

for TH-TS 1525 U, TE-TS 1825 U,
TH-TS 1525 U, TH-TS 1525 ECO ,
TE-CC 1825 U



Art. No. 43.106.30
PU 1
EAN code 4 006825 587715

GRINDING/ SANDING BELT SET

for TH-US 240
50 x 686 mm, 5 pieces



Art. No. 44.198.09
PU 1
EAN code 4 006825 565010

GRINDING/ SANDING BELT SET

for TC-US 400
100 x 914 mm, 3 pieces



Art. No. 44.198.30
PU 1
EAN code 4 006825 443783

SANDPAPER SET

for TC-US 400
150 mm, Velcro, 3 pieces



Art. No. 44.198.45
PU 1
EAN code 4 006825 529036

Further accessories from kwb
www.kwb.eu

They suck up everything – except the money from your wallet!



Anja Herner
(Intern. Product Management, Einhell Germany AG)

It used to be a real torture going round with my household vacuum cleaner, but now I'm almost professional standard. My Einhell wet and dry vacuum cleaner is ideal for work outside. And if the washing machine starts to leak inside, the Einhell vacuum cleaner gets rid of that as well, without making a fuss. In the TE-VC 1925 SA I've got a real all-rounder in the house!

Note: For safe handling of the products please refer to the instructions in the operating manual.

ASH VACUUM CLEANER

TH-VC 1318




Mains voltage	230 V ~ 50 Hz
Rating	500 W S1
Suction power	130 mbar
Suction hose length	1.0 m
Tank volume	18 l
Net weight | gross weight	2.9 kg | 3.7 kg
Packing dimensions	325 x 310 x 375 mm
Packaging unit	1
Article number	23.516.22
EAN code	4 006825 585391



Carrying handle



Fine filter

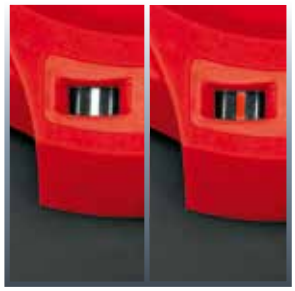

Level indicator



Cable rewind

ASH VACUUM CLEANER

TH-VC 1425




Mains voltage	230 V ~ 50 Hz
Rating	700 W S1
Suction power	140 mbar
Suction hose length	1.0 m
Tank volume	25 l
Net weight | gross weight	3.8 kg | 4.9 kg
Packing dimensions	330 x 328 x 490 mm
Packaging unit	1
Article number	23.516.31
EAN code	4 006825 585407



Wheels



Fine filter



Level indicator



Cable rewind

WET AND DRY VACUUM CLEANER

TC-VC 1812 S



Mains voltage	220 – 240 V ~ 50 Hz
Rating	1250 W S1
Suction power	180 mbar
Suction hose length	1.5 m
Suction hose diameter	36 mm
Tank volume	12 l
Net weight | gross weight	3.6 kg | 4.4 kg
Packing dimensions	290 x 285 x 420 mm
Packaging unit	1
Article number	23.423.70
EAN code	4 006825 603057


Practical cable holder


Blow connector


Accessory mount


Wheels

WET AND DRY VACUUM CLEANER

TH-VC 1815



Mains voltage	230 V ~ 50 Hz
Rating	1250 W S1
Suction power	180 mbar
Suction hose length	1.5 m
Suction hose diameter	36 mm
Tank volume	15 l
Noise level	80 dB(A)
Net weight | gross weight	4.2 kg | 5.0 kg
Packing dimensions	330 x 330 x 440 mm
Packaging unit	1
Article number	23.402.90
EAN code	4 006825 585179


Practical cable holder


Blow connector


Accessory mount


Wheels

WET AND DRY VACUUM CLEANER

TH-VC 1820 S



Mains voltage	230 V ~ 50 Hz
Rating	1250 W S1
Suction power	180 mbar
Suction hose length	1.5 m
Suction hose diameter	36 mm
Tank volume	20 l
Noise level	82 dB(A)
Net weight | gross weight	4.7 kg | 5.6 kg
Packing dimensions	325 x 320 x 460 mm
Packaging unit	1
Article number	23.421.67
EAN code	4 006825 585162



Practical cable holder



Blow connector



Accessory mount



Wheels

WET AND DRY VACUUM CLEANER WITH ASH FILTER

TH-VC 1820 S KIT
Item identical to TH-VC 1820 S,
but **with ash filter**



Art. No.	23.421.75
PU	1
EAN code	4 006825 584035

WET AND DRY VACUUM CLEANER

TH-VC 1930 SA



Mains voltage	230 V ~ 50 Hz
Rating	1500 W S1
Suction power	190 mbar
Automatic socket outlet max.	2000 W
Suction hose length	2.5 m
Suction hose diameter	36 mm
Tank volume	30 l
Noise level	80 dB(A)
Net weight | gross weight	6.8 kg | 8.6 kg
Packing dimensions	400 x 390 x 550 mm
Packaging unit	1
Article number	23.421.90
EAN code	4 006825 584356

WET AND DRY VACUUM CLEANER

TE-VC 1820



Mains voltage	230 V ~ 50 Hz
Rating	750 W S1
Suction power	180 mbar
Suction hose length	2.5 m
Suction hose diameter	36 mm
Tank volume	20 l
Noise level	70 dB(A)
Net weight | gross weight	7.7 kg | 9.2 kg
Packing dimensions	355 x 364 x 524 mm
Packaging unit	1
Article number	23.423.41
EAN code	4 006825 585896


Accessory mount


Blow connector


Practical cable holder


Blow connector


Water drain screw


Wheels


Accessory mount


Wheels

WET AND DRY VACUUM CLEANER

TE-VC 1925 SA



Mains voltage	230 V ~ 50 Hz
Rating	800 W S1
Suction power	190 mbar
Automatic socket outlet max.	2600 W
Suction hose length	3.0 m
Suction hose diameter	36 mm
Tank volume	25 l
Noise level	72 dB(A)
Net weight | gross weight	9.7 kg | 11.6 kg
Packing dimensions	472 x 386 x 561 mm
Packaging unit	1
Article number	23.423.54
EAN code	4 006825 586015

WET AND DRY VACUUM CLEANER

TE-VC 2230 SA



Mains voltage	230 V ~ 50 Hz
Rating	1150 W S1
Suction power	220 mbar
Automatic socket outlet max.	2250 W
Suction hose length	3.0 m
Suction hose diameter	36 mm
Tank volume	30 l
Noise level	74 dB(A)
Net weight | gross weight	10.2 kg | 13.1 kg
Packing dimensions	472 x 386 x 561 mm
Packaging unit	1
Article number	23.423.63
EAN code	4 006825 586022


Blow connector


Water drain screw


Trolley function


Accessory mount


Accessory mount


Wheels


Water drain screw


Comprehensive range of accessories

WET AND DRY VACUUM CLEANER

TE-VC 2340 SA

NEW!



Mains voltage	220 - 240 V ~ 50 Hz
Rating	1200 W
Suction power	230 mbar
Automatic socket outlet max.	2250 W
Suction hose length	3.0 m
Suction hose diameter	36 mm
Tank volume	40 l
Noise level	74 db(A)
Net weight | gross weight	12.0 kg | 14.2 kg
Packing dimensions	465 x 376 x 752 mm
Packaging unit	1
Article number	23.423.80
EAN code	4 006825 605372



Blow connector for blow-cleaning of hard-to-reach areas



Water drain screw for emptying the tank



Practical accessories holder for neat storage



Practical cable holder for neat storage

Einhell Germany AG

ECO Power
Efficient Technology by Einhell


ECO-POWER


Technical know-how for the well-being of our environment

Each of us is responsible for the environment in which we live. With know-how and technology we want to make efficient use of energy. ECO Power stands for the use of efficient technology. We exploit every possibility for appreciably improving the ratio of energy input and yield in all our products.

ECO-Power stands for:
- Optimised energy efficiency – high performance with low energy consumption
- Intelligent, technically sophisticated product development
- High-quality components
- Well-conceived product design

Extreme Durability:
- **High-quality components**
- **First-class workmanship**
- **Long life – guaranteed!**

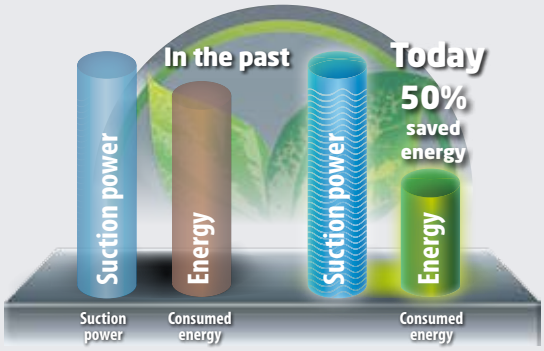

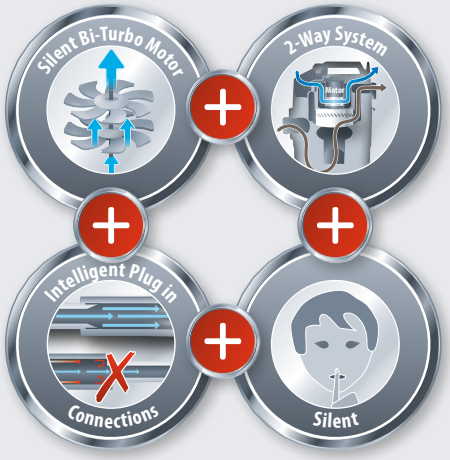



 Note: For safe handling of the products please refer to the instructions in the operating manual.

FINE ASH FILTER
for household vacuum cleaners
18 l



Art. No. 23.516.12
PU 1
EAN code 4 006825 548938

ASH FILTER
for wet and dry vacuum cleaners
12 l



Art. No. 23.516.06
PU 1
EAN code 4 006825 578041

PLEATED FILTER
for TE-VC 1820



Art. No. 23.511.10
PU 1
EAN code 4 006825 231090

PLEATED FILTER
for TE-VC 1820, TE-VC 1925 SA,
TE-VC 2230 SA, TH-VC 1815,
TH-VC 1820 S, TH-VC 1820/1 S,
TH-VC 1930 SA, TE-VC 2340 SA



Art. No. 23.511.13
PU 1
EAN code 4 006825 566512

PAPER FILTER SET
10 pieces




Art. No. 23.511.00
PU 1
EAN code 4 006825 231083

FOAM FILTERS
for wet vacuuming
Pack content 10 pieces



Art. No. 23.511.30
PU 1
EAN code 4 006825 236132

FABRIC FILTER
for universal use



Art. No. 23.511.40
PU 1
EAN code 4 006825 231151

DIRT BAG KIT
for TC-VC 1812 S
12 l capacity
Pack content 5 bags



Art. No. 23.511.59
PU 1
EAN code 4 006825 606065

DIRT BAG
20 l capacity
Pack content 5 bags



Art. No. 23.511.52
PU 1
EAN code 4 006825 236040

DIRT BAG
25 l capacity
Pack content 5 bags



Art. No. 23.511.50
PU 1
EAN code 4 006825 231281

DIRT BAG
30 l capacity
Pack content 5 bags



Art. No. 23.511.70
PU 1
EAN code 4 006825 528763

DIRT BAG
40 l capacity
Pack content 5 bags

NEW!




Art.-Nr. 23.511.80
VE 1
EAN-Code 4 006825 607468

EXTENSION HOSE
Ø 36 mm,
with 4 connection adapters



Art. No. 23.620.00
PU 5
EAN code 4 006825 543018

VACUUM CLEANER ACCESSORY SET
for TH-VC 1815, TH-VC 1820/1 S,
TH-VC 1930 SA, TE-VC 1820,
TE-VC 1925 SA, TE-VC 2230 SA,
TE-VC 2340 SA | Ø 36 mm, 5 pieces



Art. No. 23.620.10
PU 1
EAN code 4 006825 604290

HIGH PRESSURE CLEANER

TC-HP 1334



incl. Easy Pack

TECHNIK ZU HAUSE.de
Preis/Leistung
sehr gut

DE: price/performance "Very good"

Mains voltage	220 V – 240 V ~ 50 Hz
Rating	1300 W S1
Max. Working pressure	100 bar
Delivery rate	340 l/h
Range	3 m hose + 5 m power cable
Standard accessories	Easy pack
Net weight | gross weight	5.6 kg | 6.4 kg
Packing dimensions	250 x 210 x 470 mm
Packaging unit	1
Article number	41.407.10
EAN code	4 006825 602791



The featherweight: portable and ideal for mobile use



Practical: lance holder, hose and cable winder



With Jet-Click separator – for easy attachment of the nozzles to the device



Practical, additional cable holder

HIGH PRESSURE CLEANER

TC-HP 1538 PC



incl. Easy Pack + Basic Pack

Mains voltage	220 – 240 V ~ 50 Hz
Rating	1500 W S1
Max. Working pressure	110 bar
Delivery rate	380 l/h
Range	5 m hose + 5 m power cable
Standard accessories	Easy pack + Basic pack
Net weight | gross weight	8.3 kg | 10.2 kg
Packing dimensions	320 x 310 x 635 mm
Packaging unit	1
Article number	41.407.20
EAN code	4 006825 602807



Handle and sturdy wheels ensure maximum mobility



Practical: lance holder, hose and cable winder



With Jet-Click separator – for easy attachment of the nozzles to the device



Detachable hose ensures maximum flexibility



HIGH PRESSURE CLEANER

TC-HP 2042 PC

incl. Easy Pack + Basic Pack



Mains voltage	220 – 240 V ~ 50 Hz
Rating	2000 W S1
Max. Working pressure	150 bar
Delivery rate	420 l/h
Range	6 m hose + 5 m power cable
Standard accessories	Easy pack + Basic pack
Net weight | gross weight	9.1 kg | 11.0 kg
Packing dimensions	320 x 310 x 655 mm
Packaging unit	1
Article number	41.407.30
EAN code	4 006825 602821



Handle and sturdy wheels ensure maximum mobility



Practical: lance holder, hose and cable winder



With Jet-Click separator – for easy attachment of the nozzles to the device



Detachable hose ensures maximum flexibility



Note: For safe handling of the products please refer to the instructions in the operating manual.

Accessories with system

Einhell Germany AG

Product range overview



TC-HP 1334

Easy



TC-HP 1538 PC

Easy + Basic



TC-HP 2042 PC

Easy + Basic

Easy pack – included with all pressure cleaners



Hose



Pivoted gun



Lance



Rotating nozzle



Spray container

Basic pack – included with selected pressure cleaners



Spot/wide jet nozzle



Terrace cleaner

Extra accessories – also available

				
Model	**HPH 6** Extension hose (6 m)	**HPWB 17** Washing brush (17 cm wide)	**HPRB 15** Rotating washing brush (Ø 15 cm)	**HPAN 90** Angle nozzle (90°)
Packaging unit	1	1	1	1
Article number	41.440.06	41.440.08	41.440.09	41.440.07
EAN code	4 006825 605402	4 006825 605457	4 006825 605792	4 006825 605426

Einhell compressors bring a lot of pressure to bear – and on prices as well.



Daniel Protschka
(Techn. Product Manager, Einhell Germany AG)

As a product manager, I am of course extremely conscious of quality. I've now set up a workshop at home and got the Einhell compressor for it – perfect! With 8 bar and a tank volume of 24 l, it delivers enough power for all the work that comes up, but doesn't take up too much space. I'm now the greatest for my nieces as well, because no one can blow up balloons as fast as I can!

Note: For safe handling of the products please refer to the instructions in the operating manual.

OIL-FREE COMPRESSOR

TH-AC 190 Kit





DE: price/performance "Good – Very good"

CE

Mains voltage	220 – 240 V ~ 50 Hz
Rating	1100 W S3 15%
Intake capacity	190 l/min
Output	at 0 bar: 165 l/min at 4 bar: 83 l/min at 7 bar: 55 l/min
Speed	15000 min^{-1}
Pump speed	3450 min^{-1}
Operating pressure	max. 8 bar
Number of cylinders	1
Net weight | gross weight	5.8 kg | 6.4 kg
Packing dimensions	385 x 150 x 400 mm
Packaging unit	1
Article number	40.205.36
EAN code	4 006825 597257



Maintenance-free operation



Ergonomic design for easy transport



Space saving storing



Light and compact construction

OIL-FREE COMPRESSOR

TH-AC 190/6 OF



CE

Mains voltage	230 V ~ 50 Hz
Rating	1100 W S3 25%
Intake capacity	185 l/min
Output	at 0 bar: 139 l/min at 4 bar: 77 l/min at 7 bar: 60 l/min
Tank capacity	6 l
Speed	4000 min^{-1}
Pump speed	3550 min^{-1}
Operating pressure	max. 8 bar
Number of cylinders	1
Net weight | gross weight	9.2 kg | 10.6 kg
Packing dimensions	352 x 312 x 365 mm
Packaging unit	1
Article number	40.204.95
EAN code	4 006825 592184



Maintenance-free motor



Mobile compressor with compressed air storage



Ergonomic design for easy transport



Cable rewind

OIL-FREE COMPRESSOR

TH-AC 200/24 OF



Mains voltage	230 V ~ 50 Hz
Rating	1100 W S1
Intake capacity	140 l/min
Output	at 0 bar: 110 l/min at 4 bar: 70 l/min at 7 bar: 45 l/min
Tank capacity	24 l
Speed	2850 min^{-1}
Pump speed	2850 min^{-1}
Operating pressure	max. 8 bar
Number of cylinders	1
Net weight | gross weight	19.5 kg | 21.0 kg
Packing dimensions	575 x 270 x 605 mm
Packaging unit	1
Article number	40.205.15
EAN code	4 006825 595925



Maintenance-free motor



Numerous applications up to 8 bar



Big wheels and holder for easy transport



User-friendly drain screw

COMPRESSOR

TC-AC 190/24/8

NEW!



Mains voltage	230 V ~ 50 Hz
Rating	1500 W S2 15 min
Intake capacity	15 l/min
Output	at 0 bar: 98 l/min at 4 bar: 76 l/min at 7 bar: 60 l/min
Tank capacity	24 l
Speed	2850 min^{-1}
Pump speed	2850 min^{-1}
Operating pressure	max. 8 bar
Number of cylinders	1
Net weight | gross weight	25.2 kg | 27.0 kg
Packing dimensions	605 x 265 x 635 mm
Packaging unit	1
Article number	40.073.25
EAN code	4 006825 610635



Maintenance-free motor



Numerous applications up to 8 bar



Big wheels and holder for easy transport



User-friendly drain screw

OIL-FREE COMPRESSOR

TH-AC 200/40 OF



10 YEARS WARRANTY AGAINST RUSTING THROUGH

CE

Mains voltage	230 V ~ 50 Hz
Rating	1100 W S1
Intake capacity	140 l/min
Output	at 0 bar: 110 l/min at 4 bar: 70 l/min at 7 bar: 45 l/min
Tank capacity	40 l
Speed	2850 min^{-1}
Pump speed	2850 min^{-1}
Operating pressure	max. 8 bar
Number of cylinders	1
Net weight | gross weight	23.0 kg | 25.0 kg
Packing dimensions	680 x 320 x 655 mm
Packaging unit	1
Article number	40.205.16
EAN code	4 006825 595963



Maintenance-free motor



Numerous applications up to 8 bar



Big wheels and holder for easy transport



User-friendly drain screw



Note: For safe handling of the products please refer to the instructions in the operating manual.

COMPRESSOR

TC-AC 400/50/8


NEW!



10 YEARS WARRANTY AGAINST RUSTING TROUGH

CE

Mains voltage	230 V ~ 50 Hz
Rating	2200 W S3 50%
Intake capacity	400 l/min
Output	at 0 bar: 319 l/min at 4 bar: 207 l/min at 7 bar: 176 l/min
Tank capacity	50 l
Speed	2850 min^{-1}
Pump speed	2850 min^{-1}
Operating pressure	max. 8 bar
Number of cylinders	2
Net weight | gross weight	40.0 kg | 43.0 kg
Packing dimensions	770 x 350 x 670 mm
Packaging unit	1
Article number	40.101.85
EAN code	4 006825 611632



Maintenance-free motor



Numerous applications up to 8 bar



Big wheels and holder for easy transport



User-friendly drain screw

COMPRESSOR

TC-AC 400/50/8 KIT

Item identical with TC-AC 400/50/8, but incl. impact screwdriver, tire pressure gauge and spiral hose

NEW!



Art. No.	40.102.52
PU	1
EAN code	4 006825 612295

OIL-FREE COMPRESSOR

TH-AC 200/30 OF



10 YEARS WARRANTY AGAINST RUSTING THROUGH

CE

Mains voltage	230 V ~ 50 Hz
Rating	1100 W S3 25%
Intake capacity	200 l/min
Output	at 0 bar: 165 l/min at 4 bar: 83 l/min at 7 bar: 60 l/min
Tank capacity	30 l
Speed	15000 min^{-1}
Pump speed	3550 min^{-1}
Operating pressure	max. 8 bar
Number of cylinders	1
Net weight | gross weight	18.1 kg | 19.6 kg
Packing dimensions	360 x 325 x 795 mm
Packaging unit	1
Article number	40.103.94
EAN code	4 006825 597288



Maintenance-free motor



Numerous applications up to 8 bar



Big wheels and holder for easy transport



Compact, space-saving design

OIL-FREE COMPRESSOR

TH-AC 240/50/10 OF



AIR POWER +25% 10 bar

10 YEARS WARRANTY AGAINST RUSTING THROUGH

CE

Mains voltage	230 V ~ 50 Hz
Rating	1500 W S3 25%
Intake capacity	240 l/min
Output	at 0 bar: 173 l/min at 4 bar: 107 l/min at 7 bar: 76 l/min
Tank capacity	50 l
Speed	18000 min^{-1}
Pump speed	4000 min^{-1}
Operating pressure	max. 10 bar
Number of cylinders	1
Net weight | gross weight	22.3 kg | 24.6 kg
Packing dimensions	360 x 345 x 840 mm
Packaging unit	1
Article number	40.103.93
EAN code	4 006825 597295



Maintenance-free motor



Numerous applications up to 10 bar



Big wheels and holder for easy transport



Compact, space-saving design

COMPRESSOR

TE-AC 230/24



10 YEARS WARRANTY AGAINST RUSTING THROUGH

Mains voltage	230 V ~ 50 Hz
Rating	1500 W S1
Intake capacity	230 l/min
Output	at 0 bar: 132 l/min at 4 bar: 102 l/min at 7 bar: 83 l/min
Tank capacity	24 l
Speed	2850 min^{-1}
Pump speed	2850 min^{-1}
Operating pressure	max. 8 bar
Number of cylinders	1
Net weight | gross weight	22.9 kg | 25.7 kg
Packing dimensions	615 x 275 x 633 mm
Packaging unit	1
Article number	40.104.60
EAN code	4 006825 594478



Oil lubrication contributes to long life



Numerous applications up to 8 bar



Big wheels and holder for easy transport



User-friendly drain screw

COMPRESSOR

TE-AC 270/24/10



10 YEARS WARRANTY AGAINST RUSTING THROUGH

Mains voltage	230 V ~ 50 Hz
Rating	1800 W S1
Intake capacity	270 l/min
Output	at 0 bar: 140 l/min at 4 bar: 127 l/min at 7 bar: 100 l/min
Tank capacity	24 l
Speed	2850 min^{-1}
Pump speed	2850 min^{-1}
Operating pressure	max. 10 bar
Number of cylinders	1
Net weight | gross weight	27.0 kg | 29.5 kg
Packing dimensions	600 x 280 x 620 mm
Packaging unit	1
Article number	40.104.50
EAN code	4 006825 594461



Oil lubrication contributes to long life



Numerous applications up to 10 bar



Big wheels and holder for easy transport



Large, easy-to-read pressure indicators

COMPRESSOR

TE-AC 270/50/10



10 YEARS WARRANTY AGAINST RUSTING THROUGH

Mains voltage	230 V ~ 50 Hz
Rating	1800 W S1
Intake capacity	270 l/min
Output	at 0 bar: 140 l/min at 4 bar: 127 l/min at 7 bar: 100 l/min
Tank capacity	50 l
Speed	2850 min^{-1}
Pump speed	2850 min^{-1}
Operating pressure	max. 10 bar
Number of cylinders	1
Net weight | gross weight	33.7 kg | 36.8 kg
Packing dimensions	770 x 330 x 720 mm
Packaging unit	1
Article number	40.104.40
EAN code	4 006825 594447



Oil lubrication contributes to long life



Numerous applications up to 10 bar



Big wheels and holder for easy transport



Large, easy-to-read pressure indicators

Einhell Germany AG

SUPER AIR POWER +25% 10 bar

THE COMPRESSOR SERIES WITH +25% MORE POWER.

10 bar tank pressure instead of the usual 8 bar makes the Einhell compressor series a force to be reckoned with for all those day-to-day jobs. Where standard compressors reach their limits, Einhell Super Air Power compressors only just begin to show what they are really made of. The benefits for you are an unimagined diversity of uses and compressed air accessories!


WITH SUPER AIR POWER YOU WORK:

More efficiently

More quickly

With greater versatility

+25%
more energy

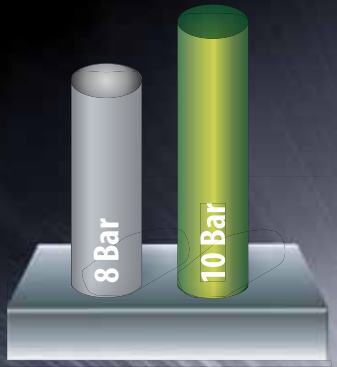



COMPRESSOR

TE-AC 300/50/10



Mains voltage	230 V ~ 50 Hz
Rating	2000 W S3 50%
Intake capacity	300 l / min
Output	at 0 bar: 243 l/min at 4 bar: 217 l/min at 7 bar: 184 l/min
Tank capacity	50 l
Speed	2850 min^{-1}
Pump speed	1330 min^{-1}
Operating pressure	max. 10 bar
Number of cylinders	2
Net weight | gross weight	49.3 kg | 54.8 kg
Packing dimensions	850 x 365 x 750 mm
Packaging unit	1
Article number	40.101.81
EAN code	4 006825 593129



Oil lubrication contributes to long life



Numerous applications up to 10 bar



Belt drive for low-noise operation and high efficiency



High air delivery rate thanks to a double compressor unit

Note: For safe handling of the products please refer to the instructions in the operating manual.

COMPRESSOR

TE-AC 480/100/10 D

THREE PHASE CURRENT



DE: price/performance "Good – Very good"

Heimwerker 1,3

AIR POWER +25% 10 bar

10 YEARS WARRANTY AGAINST RUSTING THROUGH

HIGH QUALITY COMPONENTS EXTREME DURABILITY 4000

CE

Mains voltage	400 V 3~ 50 Hz three phase current
Rating	3000 W S1
Intake capacity	480 l / min
Output	at 0 bar: 389 l/min at 4 bar: 348 l/min at 7 bar: 308 l/min
Tank capacity	100 l
Speed	2850 min^{-1}
Pump speed	1310 min^{-1}
Operating pressure	max. 10 bar
Number of cylinders	2
Net weight | gross weight	72.1 kg | 81.1 kg
Packing dimensions	1005 x 412 x 890 mm
Packaging unit	1
Article number	40.102.31
EAN code	4 006825 593143



Oil lubrication contributes to long life



Numerous applications up to 10 bar



Belt drive for low-noise operation and high efficiency



Large air supply for many different applications

Einhell Germany AG

MORE OPTIONS, MORE PERSPECTIVE!

The graphs on the compressor tanks indicate the many different uses of the relevant device.

BLOW-OUT PISTOLS
For easy and fast cleaning of work areas. Short and long blow-out pistols.

TIRE INFLATION METERS
For filling ties of all kinds. Tire inflation meter also available in professional version.

SPRAY GUNS AND UNDERSEAL SPRAY GUNS
Flexible in use – including for underseal applications.

PAINT SPRAY GUNS
The quick and easy solution for a wide variety of painting jobs.

RATCHET AND HAMMER SCREWDRIVER
With the ratchet and hammer screwdriver you'll release and fasten practically any screw.

ROD GRINDER
For carrying out grinding jobs of all types with ease.

STAPLER & NAILER SET
With staples and nails of many different sizes.

ECCENTRIC GRINDER/SANDER
For the effortless grinding/sanding of even large areas.

CHISEL HAMMER SET
Together with the Super Air Power provided by Einhell compressors you can tackle even small demolition jobs.

JET GUN & SUCTION-FEED SPRAY PISTOL
Enables applications like sandblasting.

BLOW-OUT PISTOL
SHORT



Art. No. 41.331.00
PU 1
EAN code 4 006825 411065

BLOW-OUT PISTOL
LONG



Art. No. 41.331.02
PU 1
EAN code 4 006825 417067

TIRE PRESSURE GAUGE



Art. No. 41.370.00
PU 1
EAN code 4 006825 411164

TIRE PRESSURE GAUGE
PROFI




Art. No. 41.331.10
PU 1
EAN code 4 006825 574173

PAINT SPRAY GUN
CUP




Art. No. 41.330.00
PU 1
EAN code 4 006825 411010

PAINT SPRAY GUN
PROFI, CUP



Art. No. 41.330.30
PU 1
EAN code 4 006825 574180

PAINT SPRAY GUN
SUCTION-FEED CAN



Art. No. 41.329.00
PU 1
EAN code 4 006825 411003

SPRAY GUN
SUCTION-FEED CAN



Art. No. 41.332.00
PU 1
EAN code 4 006825 411072

COMPRESSED AIR KIT
3 pieces



Art. No. 41.327.41
PU 1
EAN code 4 006825 417050

PROFI COMPRESSED AIR KIT
5 pieces



Art. No. 41.327.20
PU 1
EAN code 4 006825 410020

JET GUN
SUCTION-FEED CAN



Art. No. 41.333.00
PU 1
EAN code 4 006825 411089

SUCTION-FEED SPRAY PISTOL
DSP 226



Art. No. 41.334.00
PU 1
EAN code 4 006825 411102

UNDERSEAL GUN



Art. No. 41.335.01
PU 1
EAN code 4 006825 411133

IMPACT SCREWDRIVER SET
DSS 260/2



Art. No. 41.389.10
PU 1
EAN code 4 006825 504361

RATCHET SCREWDRIVER KIT
DRS 200/2



Art. No. 41.391.70
PU 1
EAN code 4 006825 504385

CHISEL HAMMER KIT
DMH 250/2



Art. No. 41.390.08
PU 1
EAN code 4 006825 504392

PIN GRINDER KIT
DSL 250/2



Art. No. 41.385.20
PU 1
EAN code 4 006825 504378

COMPRESSED AIR ECCENTRIC SANDER
DSE 125




Art. No. 41.333.25
PU 1
EAN code 4 006825 581607

STAPLER/NAILER KIT
DTA 25/2




Art. No. 41.377.55
PU 1
EAN code 4 006825 504415

NAILS
25 mm, 3000 pieces




Art. No. 41.378.71
PU 1
EAN code 4 006825 504460

NAILS
40 mm, 3000 pieces



Art. No. 41.378.72
PU 1
EAN code 4 006825 504866

NAILS
50 mm, 3000 pieces




Art. No. 41.378.73
PU 1
EAN code 4 006825 505795

STAPLES
5 x 13 mm, 3000 pieces




Art. No. 41.378.50
PU 1
EAN code 4 006825 504422

STAPLES
5 x 16 mm, 3000 pieces




Art. No. 41.378.55
PU 1
EAN code 4 006825 504439

STAPLES
5 x 25 mm, 3000 pieces



Art. No. 41.378.60
PU 1
EAN code 4 006825 504446

STAPLES
5 x 40 mm, 3000 pieces



Art. No. 41.378.61
PU 1
EAN code 4 006825 505788

SPECIAL COMPRESSED AIR OIL
500 ml



Art. No. 41.383.10
PU 1
EAN code 4 006825 411270

MINI OILER
R 1/4" internal thread
R 1/4" external thread



Art. No. 41.350.02
PU 1
EAN code 4 006825 581614

FILTER + PRESSURE REDUCER

incl. threaded nipple and quick-lock coupling R1/4“



Art. No. 41.342.00
PU 1
EAN code 4 006825 410051

FILTER + PRESSURE REDUCER

incl. threaded nipple and quick-lock coupling R3/8“



Art. No. 41.341.00
PU 1
EAN code 4 006825 410044

COMBINATION CONDITIONING UNIT

incl. threaded nipple and quick-lock coupling R1/4"



Art. No. 41.350.01
PU 1
EAN code 4 006825 410181

COMBINATION CONDITIONING UNIT

incl. threaded nipple and quick-lock coupling R3/8"



Art. No. 41.350.00
PU 1
EAN code 4 006825 410075

SPIRAL HOSE

4 m, Ø 6 mm



Art. No. 41.394.10
PU 1
EAN code 4 006825 411737

SPIRAL HOSE

8 m, Ø 6 mm



Art. No. 41.394.20
PU 1
EAN code 4 006825 411744

FABRIC HOSE

10 m , Ø 6 mm



Art. No. 41.381.00
PU 1
EAN code 4 006825 410082

FABRIC HOSE


15 m , Ø 6 mm



Art. No. 41.382.00
PU 1
EAN code 4 006825 410099

FABRIC HOSE

15 m , Ø 9 mm



Art. No. 41.382.10
PU 1
EAN code 4 006825 574166

AUTOMATIC HOSE ROLLER

9 m + 1 m



Art. No. 41.380.00
PU 1
EAN code 4 006825 509564

QUICK-LOCK COUPLING

R 1/4" external thread



Art. No. 41.392.07
PU 1
EAN code 4 006825 560824

QUICK-LOCK COUPLING

R 3/8" external thread



Art. No. 41.392.08
PU 1
EAN code 4 006825 560831

QUICK-LOCK COUPLING

R 1/2" external thread



Art. No. 41.392.09
PU 1
EAN code 4 006825 596939

QUICK-LOCK COUPLING

R 1/4" internal thread



Art. No. 41.392.06
PU 1
EAN code 4 006825 410334

QUICK-LOCK COUPLING
R 3/8" internal thread



Art. No. 41.392.05
PU 1
EAN code 4 006825 410327

QUICK-LOCK COUPLING
R 1/2" internal thread



Art. No. 41.392.10
PU 1
EAN code 4 006825 599046

QUICK-LOCK COUPLING
Ø 6 mm



Art. No. 41.393.01
PU 1
EAN code 4 006825 581638

QUICK-LOCK COUPLING
Ø 9 mm



Art. No. 41.393.02
PU 1
EAN code 4 006825 581645

HOSE CONNECTOR KIT
Ø 6 mm



Art. No. 41.395.00
PU 1
EAN code 4 006825 410136

GROMMET
Ø 6 mm



Art. No. 41.396.60
PU 1
EAN code 4 006825 411690

GROMMET
Ø 9 mm



Art. No. 41.396.61
PU 1
EAN code 4 006825 581621

HOSE CONNECTION TUBE
Ø 6 mm



Art. No. 41.393.10
PU 1
EAN code 4 006825 411720

HOSE CONNECTION TUBE
Ø 9 mm



Art. No. 41.393.20
PU 1
EAN code 4 006825 581652

HOSE NOZZLE
Ø 6 mm
R 1/4" external thread



Art. No. 41.396.65
PU 1
EAN code 4 006825 581676

HOSE NOZZLE
Ø 6 mm
R 3/8" external thread



Art. No. 41.396.66
PU 1
EAN code 4 006825 581669

THREADED NIPPLE
R 1/4" external thread



Art. No. 41.396.55
PU 1
EAN code 4 006825 562347

THREADED NIPPLE
R 3/8" external thread



Art. No. 41.396.50
PU 1
EAN code 4 006825 411683

THREADED NIPPLE
R 1/4" internal thread



Art. No. 41.396.40
PU 1
EAN code 4 006825 411676

THREADED NIPPLE
R 3/8" internal thread



Art. No. 41.396.45
PU 1
EAN code 4 006825 581683

DOUBLE NIPPLE
R 1/4" external thread



Art. No. 41.396.20
PU 1
EAN code 4 006825 411652

DOUBLE NIPPLE
R 3/8" external thread



Art. No. 41.396.10
PU 1
EAN code 4 006825 411645

REDUCTION
R 3/8" external thread,
R 1/4" external thread



Art. No. 41.396.30
PU 1
EAN code 4 006825 411669

REDUCTION
R 1/2" external thread,
R 3/8" internal thread



Art. No. 41.396.05
PU 1
EAN code 4 006825 562330

REDUCTION
R 3/8" external thread,
R 1/4" internal thread



Art. No. 41.396.00
PU 1
EAN code 4 006825 411621

DISTRIBUTOR
2 quick-lock couplings,
R 3/8" internal thread



Art. No. 41.396.80
PU 1
EAN code 4 006825 411713

CLIP KIT
5 pieces, 8 – 12 mm



Art. No. 41.396.70
PU 1
EAN code 4 006825 411706

INFLATION ADAPTER KIT
8 pieces



Art. No. 41.396.95
PU 1
EAN code 4 006825 511475

MICHELIN-NIPPLE
NS 6 mm



Art. No. 41.393.30
PU 1
EAN code 4 006825 588712

Machines that cut stones and prices down to size.



Note: For safe handling of the products please refer to the instructions in the operating manual.

TILE CUTTING MACHINE

TC-TC 618



Mains voltage	230 V ~ 50 Hz
Rating	600 W S2 10 min
Speed	3000 min^{-1}
Max. cutting thickness	35 mm (90°), 22 mm (45°)
Diamond cutting wheel	Ø 180 x Ø 25.4 mm
Protection class	IP 54
Swiveling range	0° to 45°
Workbench size	330 x 360 mm
Net weight | gross weight	9.4 kg | 10.1 kg
Packing dimensions	380 x 340 x 190 mm
Packaging unit	1
Article number	43.011.80
EAN code	4 006825 590685

TILE CUTTING MACHINE

RT-TC 430 U

WITH BASE FRAME




Mains voltage	230 V ~ 50 Hz
Rating	600 W S1
Speed	3000 min^{-1}
Max. cutting thickness	25 mm (90°), 17 mm (45°)
Max. cutting length	430 mm
Diamond cutting wheel	Ø 180 x Ø 25.4 mm (turbo)
Protection class	IP 54
Swiveling range	0° to 45°
Workbench size	500 x 385 mm
Net weight | gross weight	27.3 kg | 29.8 kg
Packing dimensions	775 x 485 x 335 mm
Packaging unit	1
Article number	43.012.62
EAN code	4 006825 540178



Table adjustment (tilt)



Precise cuts thanks to parallel stop

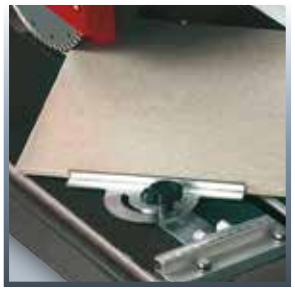

Precisely adjustable stop



Pivot-mounted motor guide



Dust-free operation thanks to wet cutting



Cable rewind



Water collection tank with cooland pump



Turbo diamond cutting wheel

TILE CUTTING MACHINE

RT-TC 520 U

WITH BASE FRAME



Mains voltage	230 V ~ 50 Hz
Rating	800 W S1
Speed	3000 min^{-1}
Max. cutting thickness	30 mm (90°), 25 mm (45°)
Max. cutting length	520 mm
Diamond cutting wheel	Ø 200 x Ø 25.4 mm (turbo)
Protection class	IP 54
Swiveling range	0° to 45°
Workbench size	570 x 385 mm
Net weight | gross weight	28.7 kg | 31.6 kg
Packing dimensions	890 x 490 x 350 mm
Packaging unit	1
Article number	43.012.71
EAN code	4 006825 551914


TILE CUTTING MACHINE

TE-TC 620 U

WITH RETRACTABLE BASE FRAME



DE: price/performance "Very Good"




Mains voltage	230 V ~ 50 Hz
Rating	900 W S2 30 min
Speed	2950 min^{-1}
Max. cutting thickness	30 mm (90°), 25 mm (45°)
Max. cutting length	620 mm
Diamond cutting wheel	Ø 200 x Ø 25.4 mm (turbo)
Protection class	IP 54
Swiveling range	0° to 45°
Workbench size	610 x 325 mm
Net weight | gross weight	35.8 kg | 38.6 kg
Packing dimensions	1013 x 455 x 460 mm
Packaging unit	1
Article number	43.012.95
EAN code	4 006825 587067



Laser for precise cutting



Pivot-mounted motor guide

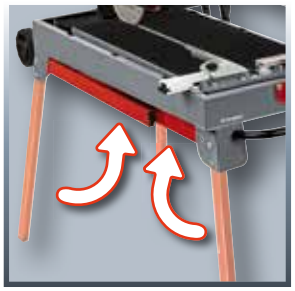

Folding feet



1 height-adjustable foot



Water collection tank with coolant pump



Removable laser



Easy transport



Pump guard cage



STONE CUTTING MACHINE

RT-SC 570 L

WITH BASE FRAME



Mains voltage	230 V ~ 50 Hz
Rating	1500 W S2 20 min
Speed	3000 min^{-1}
Max. cutting thickness	60 mm (90°), 48 mm (45°)
Max. cutting length	570 mm
Diamond cutting wheel	Ø 250 x Ø 25.4 mm (turbo)
Protection class	IP 54
Swiveling range	0° to 45°
Workbench size	630 x 450 mm
Net weight | gross weight	47.3 kg | 51.0 kg
Packing dimensions	1020 x 580 x 445 mm
Packaging unit	1
Article number	43.014.44
EAN code	4 006825 541243



Plunge cutting function



Feet can be mounted without tools



Angle stop



Removable laser

Note: For safe handling of the products please refer to the instructions in the operating manual.

STONE CUTTING MACHINE

RT-SC 920 L

WITH BASE FRAME



Mains voltage	230 V ~ 50 Hz
Rating	2200 W S2 20 min
Speed	3000 min^{-1}
Max. cutting thickness	70 mm (90°), 55 mm (45°)
Max. cutting length	920 mm
Diamond cutting wheel	Ø 300 x Ø 25.4 mm (turbo)
Protection class	IP 54
Swiveling range	0° to 45°
Workbench size	920 x 550 mm
Net weight | gross weight	65.1 kg | 71.6 kg
Packing dimensions	1450 x 705 x 490 mm
Packaging unit	1
Article number	43.014.32
EAN code	4 006825 541199



Plunge cutting function



Feet can be mounted without tools



Angle stop



Removable laser

Einhell Germany AG

DIAMOND CUTTING WHEEL

for TH-TC 618, RT-TC 430 U, TC-TC 618
Ø 180 x Ø 25.4 mm

Art. No. 43.011.70
PU 1
EAN code 4 006825 432015



TURBO DIAMOND CUTTING WHEEL

for RT-TC 430 U, TH-TC 618, TC-TC 618
Ø 180 x Ø 25.4 mm

Art. No. 43.011.76
PU 1
EAN code 4 006825 505481



TURBO DIAMOND CUTTING WHEEL

for RT-TC 520 U, TE-TC 620 U
Ø 200 x Ø 25.4 mm

Art. No. 43.011.75
PU 1
EAN code 4 006825 434361



TURBO DIAMOND CUTTING WHEEL

for RT-SC 570 L
Ø 250 x Ø 25.4 mm

Art. No. 43.011.77
PU 1
EAN code 4 006825 506723



TURBO DIAMOND CUTTING WHEEL

for RT-SC 920 L
Ø 300 x Ø 25.4 mm

Art. No. 43.011.78
PU 1
EAN code 4 006825 541649



Brand quality at the best price – that makes you want to keep on working.



Christoph Gaßner
(Marketing Management, Einhell Germany AG)

Wherever my angle grinder meets its limits, the Einhell cutting machine is the ideal device. It goes through even large profiles like a knife through butter. Swiveling machine vise with rapid adjustment, suitable for dry cutting, and so much more. It didn't take long to build the base for my new smoker. And my friends' eyes when they saw the grill were bigger than the T-bone steaks.

Note: For safe handling of the products please refer to the instructions in the operating manual.

BENCH GRINDER

TH-XG 75 Kit



DE: rating "Very good"

Mains voltage	230 V ~ 50 Hz
Rating	120 W
Speed	0 – 9900 min^{-1}
Grinding wheel	Ø 75 x Ø 10 x 20 mm
Net weight | gross weight	3.1 kg | 3.5 kg
Packing dimensions	278 x 218 x 190 mm
Packaging unit	4
Article number	44.125.60
EAN code	4 006825 595697



Adjustment of the rotational speed to suit the application



Wider range of options thanks to flexible shaft



Fine polishing wheel



Large grinding wheel

BENCH GRINDER

TH-BG 150



Mains voltage	230 V ~ 50 Hz
Rating	150 W S2 30 min
Speed	2950 min^{-1}
Grinding wheel	Ø 150 x Ø 12.7 x 16 mm
Net weight | gross weight	5.3 kg | 5.7 kg
Packing dimensions	295 x 205 x 205 mm
Packaging unit	1
Article number	44.125.70
EAN code	4 006825 595765




Rubber feet ensure safe, low-vibration stability



Adjustable spark guard window



Long service life thanks to robust compact metal construction

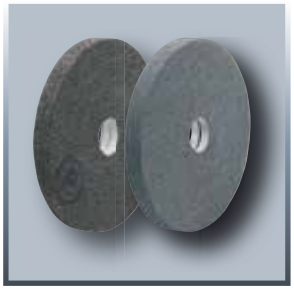

Includes coarse and fine grinding/sanding wheel (K36/K60)



BENCH GRINDER

TC-BG 175



CE

Mains voltage	230 V ~ 50 Hz
Rating	400 W S2 30 min
Speed	2950 min^{-1}
Grinding wheel	Ø 175 x Ø 32 x 25 mm
Net weight | gross weight	11.1 kg | 11.7 kg
Packing dimensions	420 x 255 x 252 mm
Packaging unit	1
Article number	44.126.30
EAN code	4 006825 601701




Rubber feet ensure safe, low-vibration stability



Adjustable spark guard window



Long service life thanks to robust compact metal construction

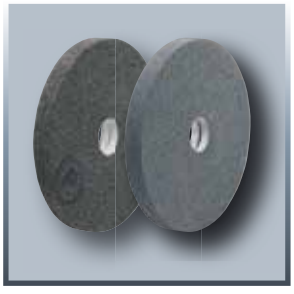

Includes coarse and fine grinding/sanding wheel (K36/K60)

Note: For safe handling of the products please refer to the instructions in the operating manual.

BENCH GRINDER

TC-BG 200



Mains voltage	230 V ~ 50 Hz
Rating	400 W S2 30 min
Speed	2950 min^{-1}
Grinding wheel	Ø 200 x Ø 32 x 25 mm
Net weight | gross weight	12.9 kg | 13.3 kg
Packing dimensions	430 x 270 x 290 mm
Packaging unit	1
Article number	44.128.20
EAN code	4 006825 601695




Rubber feet ensure safe, low-vibration stability



Adjustable spark guard window



Long service life thanks to robust compact metal construction

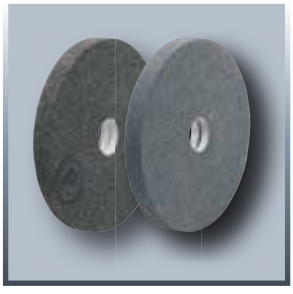

Includes coarse and fine grinding/sanding wheel (K36/K60)

WET-DRY GRINDER

TC-WD 150/200



Mains voltage	230 V ~ 50 Hz
Rating	250 W S2 30 min
Speed	Dry: 2950 min^{-1} Wet: 134 min^{-1}
Grinding wheel	Dry: Ø 150 x Ø 12.7 x 20 mm, Wet: Ø 200 x Ø 20 x 40 mm
Net weight | gross weight	9.9 kg | 11.2 kg
Packing dimensions	530 x 320 x 300 mm
Packaging unit	1
Article number	44.172.40
EAN code	4 006825 601688



Rubber feet ensure safe, low-vibration stability



Robust and compact metal structure for a long service life



Corrosion-resistant water tank



Includes coarse and fine grinding/sanding wheel (K36/K60)

STATIONARY BELT GRINDER

TH-US 240



Mains voltage	230 V ~ 50 Hz
Rating	240 W S2 30 min
Speed	2950 min^{-1}
Grinding wheel dimensions	Ø 150 x Ø 12.7 x 20 mm
Grinding/sanding belt dimensions	50 x 686 mm
Belt speed	900 m/min.
Net weight | gross weight	7.3 kg | 8.2 kg
Packing dimensions	410 x 340 x 215 mm
Packaging unit	1
Article number	44.661.50
EAN code	4 006825 595789

METAL CUTTING SAW

TH-MC 355



Mains voltage	230 V ~ 50 Hz
Rating	2000 W
Cutting disc	Ø 355 x Ø 25.4 x 3.2 mm
Speed	3000 min^{-1}
Mitre cut	-30° to +45°
Saw width max. (90°)	quadrate 170 x 70 mm round 100 mm
Clamping range	230 mm
Table size	460 x 260 mm
Net weight | gross weight	19.0 | 19.6 kg
Packing dimensions	600 x 340 x 420 mm
Packaging unit	1
Article number	45.031.40
EAN code	4 006825 596502



2 tool supports ensure maximum variability



Adjustable spark guard window for safety when working



High-torque motor



Safe and user-friendly fastening with quick-adjust facility



Rubber feet for safe, low-vibration stability



Sturdy, compact design in metal



Precise mitre cuts



For mobile use

FINE GRINDING/ SANDING WHEEL (60)

for TH-US 240, TC-WD 150/200
Ø 150 x Ø 12.7 x 20 mm



Art. No. 44.125.12
PU 1
EAN code 4 006825 440966

FINE GRINDING/ SANDING WHEEL (60)

for TC-BG 150
Ø 150 x Ø 12.7 x 16 mm



Art. No. 44.125.14
PU 1
EAN code 4 006825 505382

FINE GRINDING/ SANDING WHEEL (60)

for TC-BG 175
Ø 175 x Ø 32 x 25 mm



Art. No. 44.126.10
PU 1
EAN code 4 006825 440416

FINE GRINDING/ SANDING WHEEL (60)

for TC-BG 200
Ø 200 x Ø 32 x 25 mm



Art. No. 44.128.10
PU 1
EAN code 4 006825 440447

WET DISC FINE (80)

for TC-WD 150/200
Ø 200 x Ø 20 x 40 mm



Art. No. 44.173.00
PU 1
EAN code 4 006825 440454

COARSE GRINDING/ SANDING WHEEL (36)

for TH-US 240, TC-WD 150/200
Ø 150 x Ø 12.7 x 20 mm



Art. No. 44.125.13
PU 1
EAN code 4 006825 440959

COARSE GRINDING/ SANDING WHEEL (36)

for TC-BG 150
Ø 150 x Ø 12.7 x 16 mm



Art. No. 44.125.15
PU 1
EAN code 4 006825 505399

COARSE GRINDING/ SANDING WHEEL (36)

for TC-BG 175
Ø 175 x Ø 32 x 25 mm



Art. No. 44.126.11
PU 1
EAN code 4 006825 440423

COARSE GRINDING/ SANDING WHEEL (36)


for TC-BG 200
Ø 200 x Ø 32 x 25 mm



Art. No. 44.128.11
PU 1
EAN code 4 006825 440430

GRINDING/ SANDING BELT SET

for TH-US 240
50 x 686 mm, 5 pieces

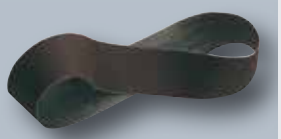

Art. No. 44.198.09
PU 1
EAN code 4 006825 565010

Further accessories from kwb
www.kwb.eu

POS SYSTEMS

Get ahead with Einhell point-of-sale solutions.

Shop-in-shop systems



- **Shop-in-shop - 360 x 240 cm**
  (on request)



- **Shop-in-shop - 240 x 130 cm**
  (on request)

Print products



- **Flyers/folders**



- **Brochures**

Permanent secondary displays



- **Wall display – Euro pallet 120 x 80 cm**
  (Article no. 720070)



- **Wall display – Euro pallet 80 x 50 cm**
  (Article no. 720075)



- **Island display – Euro pallet 120 x 80 cm**
  (Article no. 720080)



- **Island display 2 – Euro pallet 120 x 80 cm**
  (on request)



- **Modular display - “BOAH HAMMA” - Half-pallet 80 x 60 cm**
  (Article no. 720090)



- **Modular display - “Power X-Change” - Half-pallet 80 x 60 cm**
  (Article no. 720085)



- **Modular display - “BOAH HAMMA” - Quarter-pallet 60 x 40 cm**
  (Article no. 720095)

Einhell Germany AG

We´re always here to help – and that´s a promise!
Is there anything you´d like to ask us about our products?
Would you like to order a part?
Your product isn´t working as it should?

We´re at your service!
We´ll get you some help – fast and without any fuss.

iSC GmbH, Eschenstr. 6,
94405 Landau/Isar, Germany

+49 (0) 9951 959 2000

(Landline charge 14 cent/min.)
(Cell phone charge 42 cent/min.)
+49 (0) 1805 835 830

isc-gmbh.info

info@isc-gmbh.info



Einhell Germany AG
Wiesenweg 22
94405 Landau/Isar
Germany

Subject to technical modifications and errors

www.einhell.com
info@einhell.com

© 2015 Einhell Germany AG

Item no. 110170
As of: 11.2015